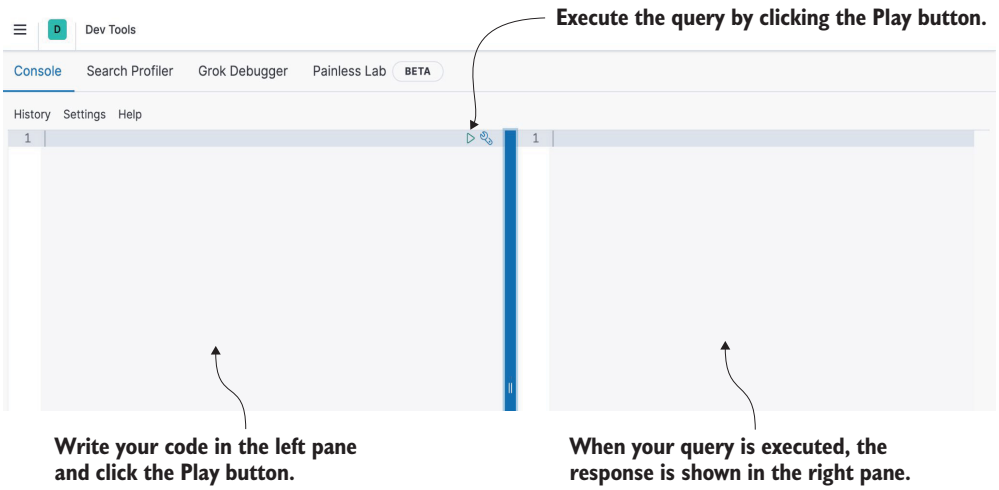


Figure 2.6 Kibana's Dev Tools code editor

Kibana must be connected to an Elasticsearch instance (the instance details are defined in the Kibana configuration file) before it's ready for action. Kibana uses the server's details to wrap the code snippet with the appropriate Elasticsearch URLs and send it to the server for execution.

To index our document for Elasticsearch, let's create a code snippet (the code was given in listing 2.1). Figure 2.7 shows the indexing request and a response.

Request

```
PUT books/_doc/1
{
  "title":"Effective Java",
  "author":"Joshua Bloch",
  "release_date":"2001-06-01",
  "amazon_rating":4.7,
  "best_seller":true,
  "prices": {
    "usd":9.95,
    "gbp":7.95,
    "eur":8.95
  }
}
```

The indexing request with our book document sent to Elasticsearch

Response

```
{
  "_index" : "books",
  "_type" : "_doc",
  "_id" : "1",
  "_version" : 1,
  "result" : "created",
  "_shards" : {
    "total" : 2,
    "successful" : 1,
    "failed" : 0
  },
  "_seq_no" : 0,
  "_primary_term" : 1
}
```

Response confirming the creation of our document in the `books` index with an ID of 1

Figure 2.7 Indexing a document in Kibana (left), and the response from Elasticsearch (right)