When the code is ready, click the Play button (figure 2.6). Kibana sends this request to the Elasticsearch server. After receiving the request, Elasticsearch processes it (figure 2.7), stores the message, and sends the response back to the client (Kibana). You can view the response on the right-hand panel in the editor.

The response is a JSON document. In figure 2.7, the `result` property indicates that the document was created successfully. You should also see a HTTP status code of "200 OK" indicating that the request was successful. The response has some additional metadata (such as the index, ID, and document version), which is self-explanatory. We discuss the constituents of the requests and responses in detail in upcoming chapters, but let me explain the request and response flow on a high level here. The overall process is illustrated in figure 2.8.

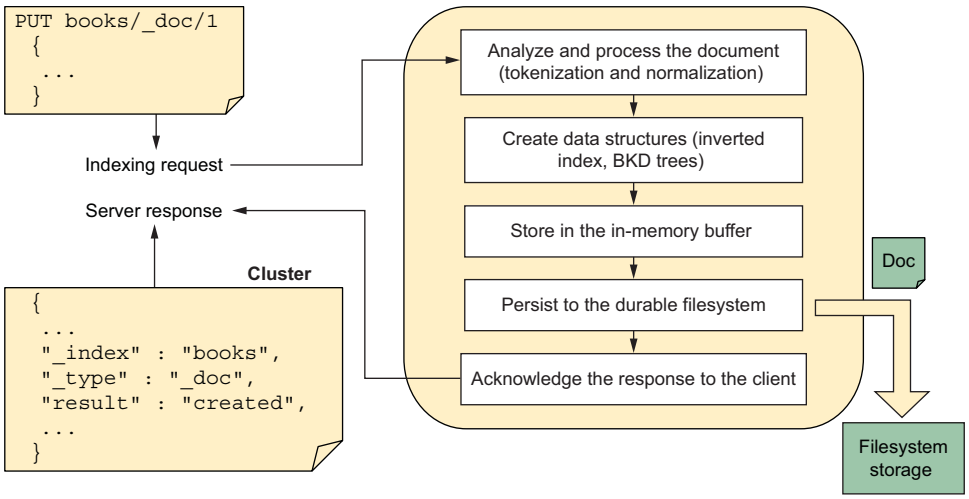


Figure 2.8 Elasticsearch's request and response flow at a high level

The flow steps are as follows:

1. Kibana posts the request to the Elasticsearch server with the required input parameters.
2. On receiving the request, the server
   - Analyzes the document data and, for speedier access, stores it in an inverted index (a high-performing data structure that is the heart and soul of the search engine)
   - Creates a new index (note that we did not create the index up front) and stores the document
   - Creates the required mappings and data schemas
   - Sends a response back to the client
3. Kibana receives the response and displays it in the right panel (figure 2.6) for our consumption.