purpose, which matches the query criteria but boosts the relevance score based on the additional parameters provided.

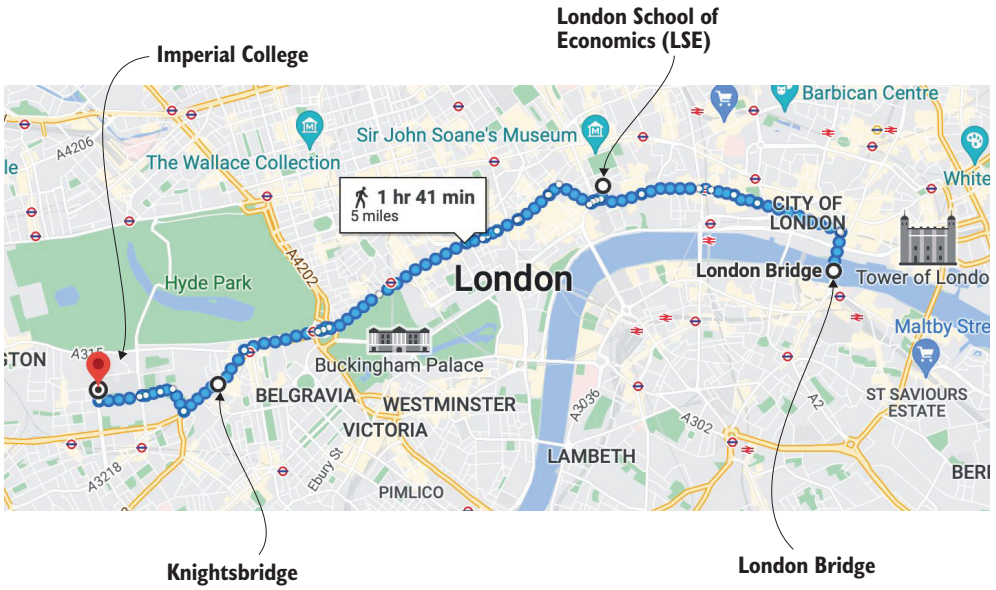



Figure 12.12 Map of London showing universities near London Bridge

Let's write the query and then dig into it to learn the details. The following listing uses a `distance_feature` query within a `bool` query to fetch universities.

**Listing 12.21 Boosting scores of universities closer to London Bridge**

```
GET universities/_search
{
  "query": {
    "distance_feature": {
      "field": "location",
      "origin": [-0.0860, 51.5048],
      "pivot": "10 km"
    }
  }
}
```

The distance_feature query declaration

The location to search for

Focal point where the distance is measured from an origin

Distance from the focal point

The query searches for all universities and returns two: the London School of Economics and Imperial College London. Additionally, if any universities are in the vicinity of 10 km around the origin (`-0.0860, 51.5048` represents London Bridge in the UK), they are scored higher than the others.

The `distance_feature` query, as defined in the listing, expects these properties:

- `field`—The `geo_point` field in the document