our `iphones` index. Ideally, this query should return the iPhone 12 and iPhone 12 Mini documents. However, the output incudes two documents (iPhone and iPhone 13) in addition to the iPhone 12 and iPhone 12 Mini. The reason is the `ids` field. This field encloses the additional documents that must be appended to the results and shown at the top of the list (the sponsored results), thus creating higher relevance scores synthetically.

The `pinned` query adds high-priority documents to results sets. These documents trump others in the list position to create sponsored results.

You may wonder if pinned results have scores: can one or more pinned results be prioritized over the other(s)? Unfortunately, the answer is no. These documents are presented in ID order as input in the query: `"ids":["1","3"]`, for example.

12.9.3 The more_like_this query

You may have noticed Netflix or Amazon Prime Video (or your favorite streaming app) showing you More Like This movies when you browse. For example, figure 12.13 shows the More Like This movies when I visit Paddington 2.

One of the requirements for users is searching for "similar" or "like" in documents: for example, finding quotes similar to Newton's "Friends and Truth," researching papers about COVID and SARS, or querying movies like *The Godfather*. Let's jump into an example to better understand the use case.

Let's say we are collecting a list of profiles about various people. To create profiles, we index sample documents into the `profiles` index.

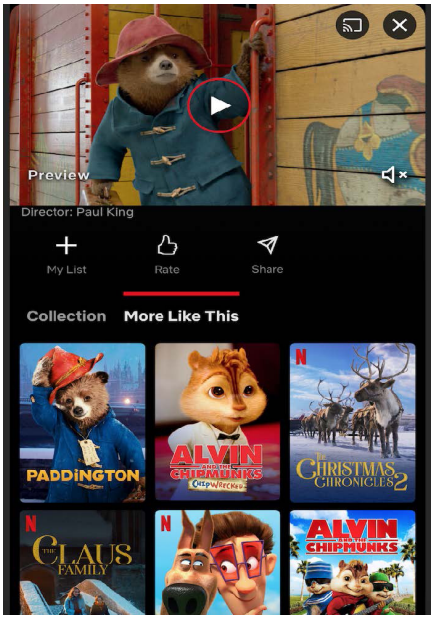


Figure 12.13 Viewing More Like This movies

Listing 12.25 Indexing sample profiles

```
PUT profiles/_doc/1
{
  "name":"John Smith",
  "profile":"John Smith is a capable carpenter"
}

PUT profiles/_doc/2
{
  "name":"John Smith Patterson",
  "profile":"John Smith Patterson is a pretty plumber"
}
```