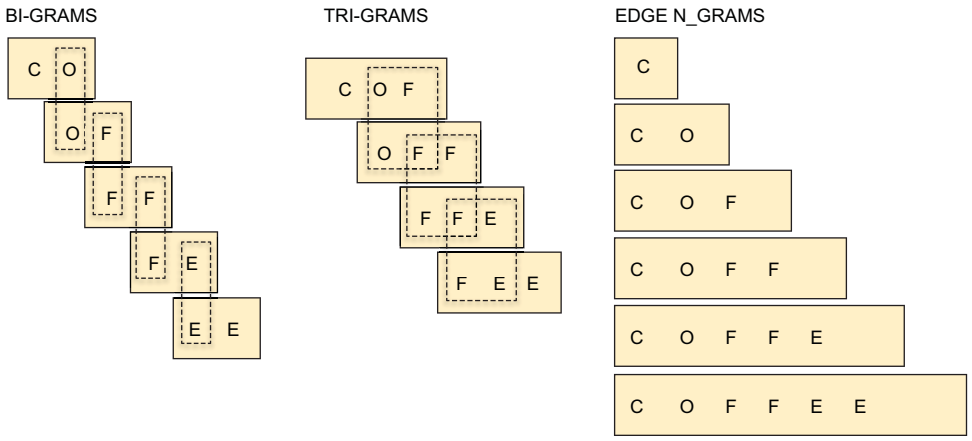


Figure 7.13 Pictorial representation of n-grams and edge n-grams

The `ngram` and `edge_ngram` tokenizers emit n-grams, as the names suggest. Let's look at them in action.

THE NGRAM TOKENIZER

To correct spelling and broken words, we usually use n-grams. The `ngram` tokenizer emits n-grams with a minimum size of 1 and a maximum size of 2 by default. For example, this code produces n-grams of the word "Bond":

```
POST _analyze
{
  "text": "Bond",
  "tokenizer": "ngram"
}
```

The output is `[B, Bo, o, on, n, nd, d]`. Each n-gram is made of one or two letters: this is the default behavior. We can customize the `min_gram` and `max_gram` sizes by specifying the configuration.

Listing 7.45 An `ngram` tokenizer

```
PUT index_with_ngram_tokenizer
{
  "settings": {
    "analysis": {
      "analyzer": {
        "ngram_analyzer":{
          "tokenizer":"ngram_tokenizer"
        }
      },
      "tokenizer": {
        "ngram_tokenizer":{
```