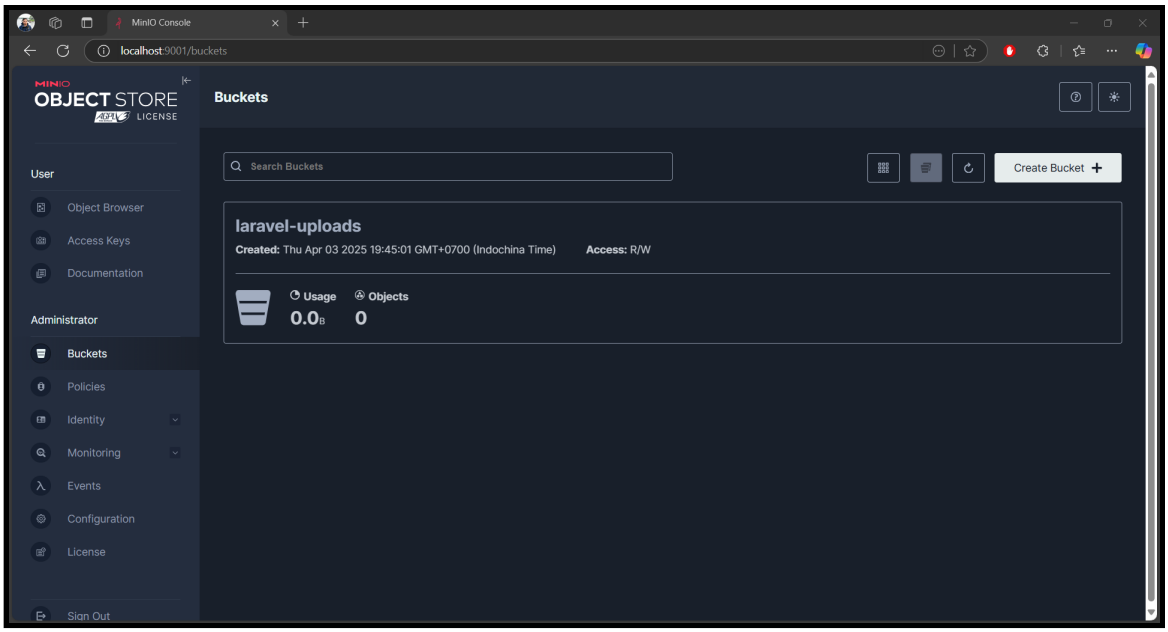


Figure 9.4: Create bucket in MinIO.

Generate an access key and secret key for your MinIO instance.

You can do this in the MinIO Console by clicking on **Access Keys** and then **Create Access Key**. Set name as `laravel`.

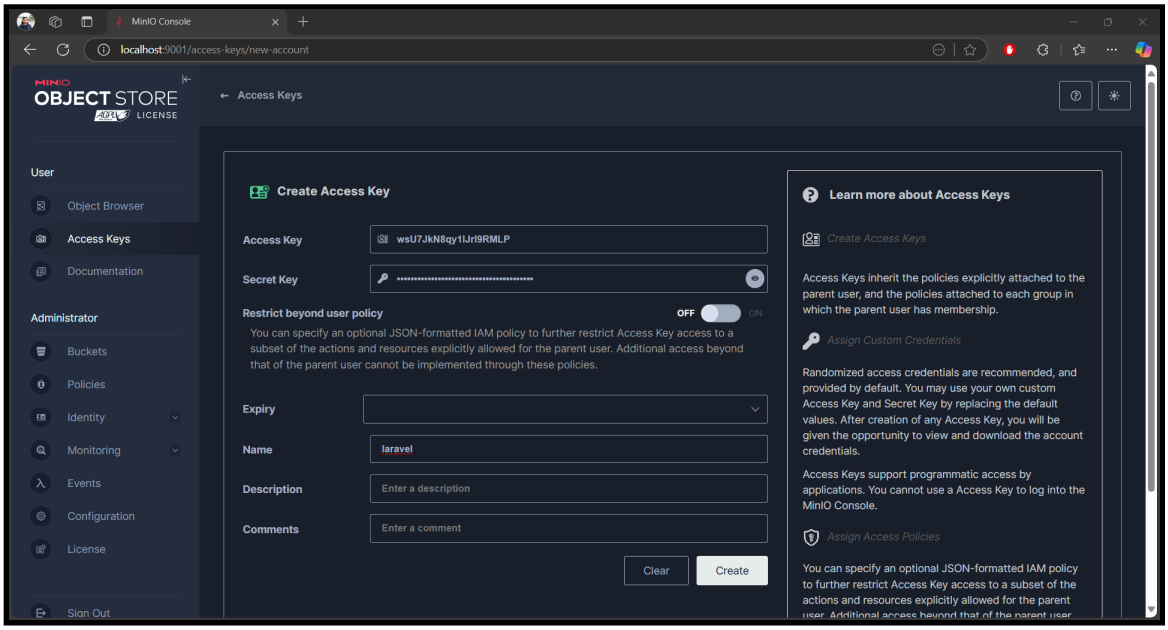


Figure 9.5: Create access key in MinIO.

Keep the access key and secret key handy, as you will need them to configure your Laravel application.