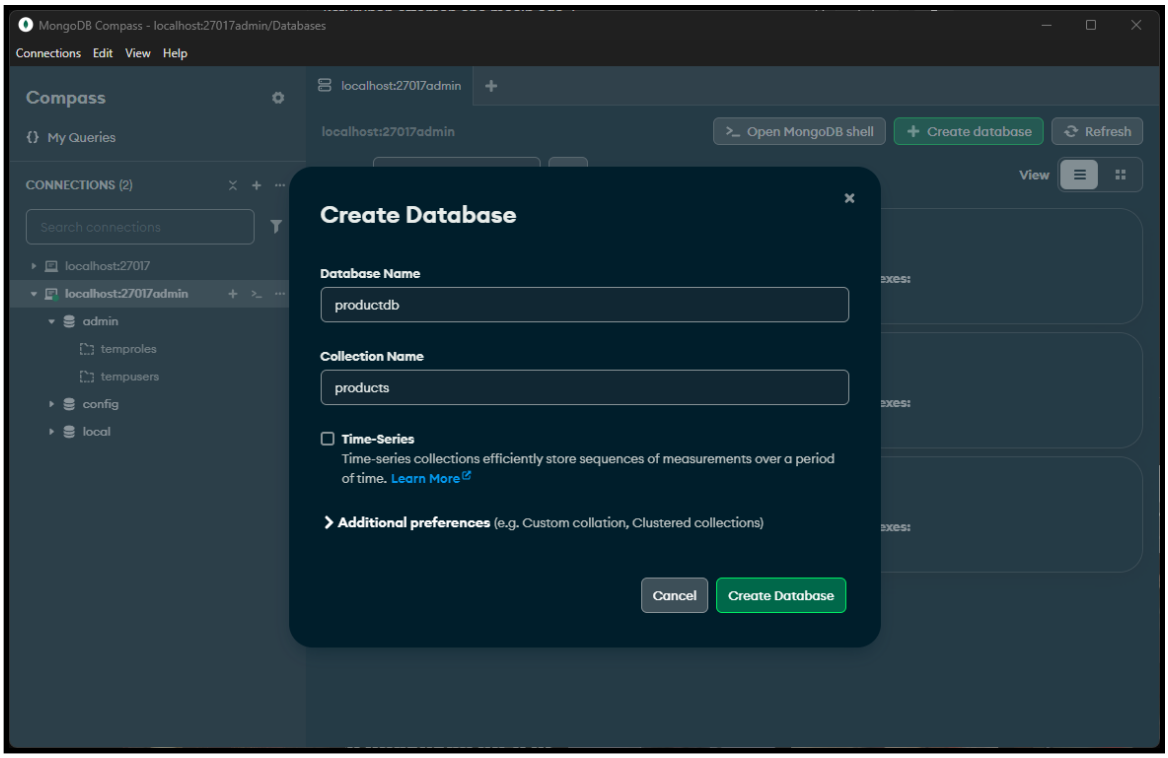


Figure 12.2: Create database and collection in MongoDB Compass.

3. After creating the database, select `productdb` from the left sidebar.

4. Click `Open MongoDB Shell` in the top right corner to open the shell.

5. We create a new user with read/write access to the `productdb` database. In the shell, run the following commands:

```
db.createUser({
user: "appuser",
pwd: "pass12345",
roles: [
    {
    role: "readWrite",
    db: "productdb"
    }
]
})
```