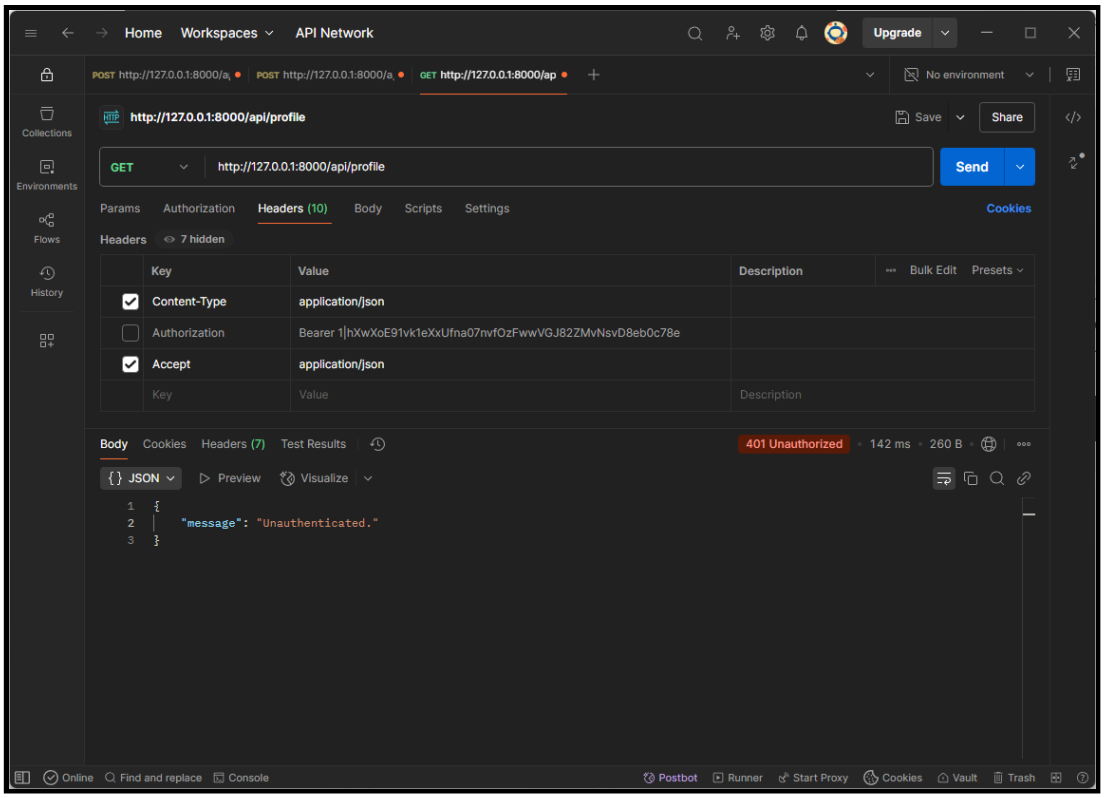


Figure 14.16: Getting unauthorized when sending without token.

Logout and Revoke Token

To logout and revoke the token, you can run this command in your terminal:

```
curl -X POST http://127.0.0.1:8000/api/logout \
     -H "Authorization: Bearer YOUR_TOKEN_HERE"
```

Here is an example of how to set up the logout request in Postman:

- **Method:** POST
- **URL:** `http://127.0.0.1:8000/api/logout`
- **Headers:** `Content-Type: application/json`
- **Headers:** `Accept: application/json`
- **Headers:** `Authorization: aBearer YOUR_TOKEN_HERE`
- Click **Send** button to send the request.

You will receive a response from server like this.

```
{
    "message": "Logged out successfully"
}
```