And that's it. To stop the `nginx` container just hit `ctrl+c` in the terminal you started it from (where the log output is being sent), which will also stop the associated `php-fpm` container. Congratulations on building a multi-container Docker application! Now we can point a web browser at TCP 80 on the Docker host and the PHP we wrote (in `index.php`) will execute, with the results being sent back to our browser.

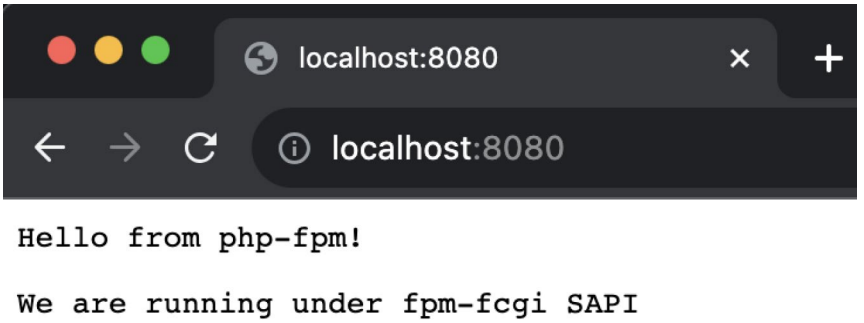



***Figure 1-1.*** *FPM success response*

## Built-in Web Server

PHP 5.4 added a new feature to the CLI binary: a built-in web-server. This is purely a development aid; it is definitely *not* intended for production use. With that said, it is a great way to test your code quickly in a web-server SAPI environment. Running the built-in web server is very simple: you run with PHP CLI binary with the `-S` switch, and a hostname/port combo (make sure to stop the `nginx` container from the previous example if it's still running):

```
$ php -S localhost:8080
[...] PHP 8.4.5 Development Server (http://localhost:8080) started
```

This starts the PHP CLI binary in `cli-server` SAPI mode: it will bind to TCP 8080 and listen for incoming traffic on the `localhost` IP address, and any log output will be sent to `STDOUT`. Open a new shell (the one we've just executed PHP with is currently occupied!) and run the following `lsof` command ("list open files"):

```
$ sudo lsof -nP -i TCP | grep 8080
```