Table 10-1. *UML visibility suffixes*

+	Public
#	Protected
-	Private

Interfaces are represented in the UML in a very similar manner. The following figure shows how inventory can be controlled in both shops and warehouses (both of which need to keep track of which books are available, and there's no need at this stage for either class to do things differently).

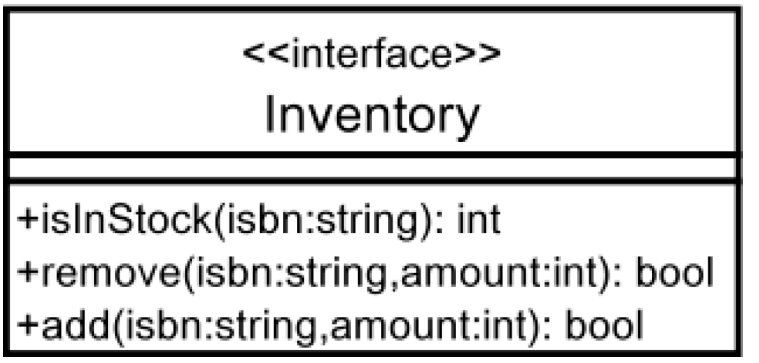


Figure 10-2. *A UML interface*

As we can see, interfaces look very much like classes. The notable difference is the stereotype (a UML extension) of "interface" in italics above the name.

This is a PHP interface, so there are no attributes (hence the middle section is empty), and all the operations are public. Our `Inventory` interface offers three members: `isInStock()` checks if a book is available (using the International Standard Book Number), and the other two methods allow us to control the flow of books in and out of inventory.

Inheritance and Interface Implementation

Relationships between parent and child classes, and between classes and interfaces, are represented with arrows. Solid lines with empty arrowheads are inheritance, and dotted lines with empty arrows are interface implementations.