```
  <body>
    <main>
      <h1>Top-level heading</h1>
      <p>A simple demo of block level elements</p>
      <div>
        &#60;hgroup&#62; elements were deprecated in the HTML5 spec
      </div>
    </main>
  </body>
</html>
```

In a local web browser, request the file (via `http://localhost:8080/block_level.html`):

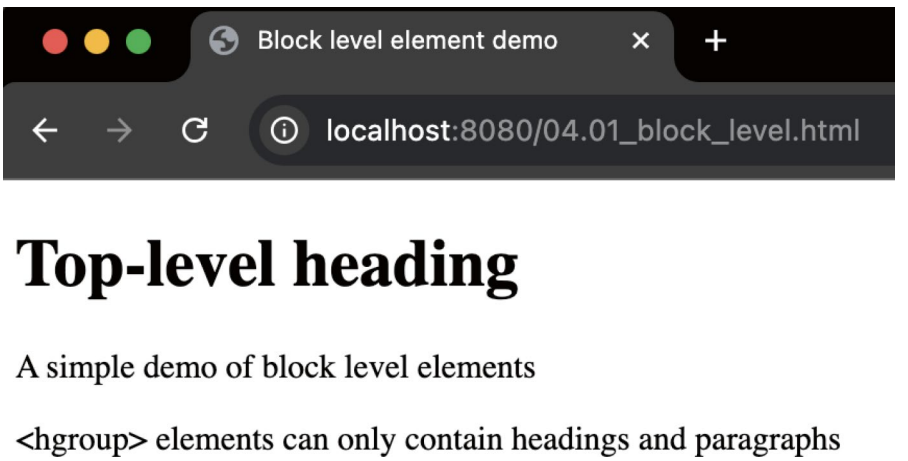


Figure 11-2. *Block-level elements demo*

Hopefully that should make sense, with each block-level element rendering on its own line. Note the use of `<` and `>`, which are rendered as chevron characters by the browser. As you might have guessed, this is an encoding scheme (HTML numeric entity encoding to be precise), which is necessary to avoid adding an unclosed `<hgroup>` tag to our content (more on this to come later). The corollary to the block-level is the *inline element*, which does not trigger new lines or take up any more width than necessary. Examples include: