commercial products. If native support for a database does not exist, it's likely you may use ODBC with an appropriate driver.

Most of the functions rely on an extension module. These may be loaded either in the php.ini file or the dl function, but most likely are compiled into PHP. Typically Windows requires use of the first method and other operating systems require the second.

We describe the PHP functions that communicate with various systems, it does not pursue introducing the intricacies of all the systems.


8.1 DBASE

The following functions work on dBase files, which typically end with a .dbf extension. If you are using the precompiled version for Windows, you will need to load the dBase extension by editing php.ini or using the dl function. The extension is likely called php_dbase.dll but was unavailable at the time of this writing. On other operating systems it's easy to compile dBase support into PHP.

Keyword

dBase was one of the first database management systems for microcomputers and the most successful in its day

The **dBase** functionality in PHP is somewhat limited. Index and memo fields are not supported. Neither is any kind of locking. The dBase functionality in PHP is meant to be a means of importing data from what has become somewhat of a lowest common denominator in data exchange.

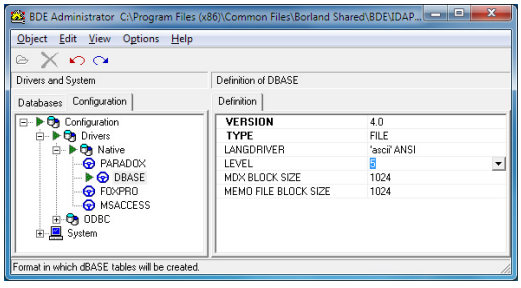

Jim Winstead added dBase support to PHP.

boolean dbase_add_record(integer database, array record)

The dbase_add_record function adds a record to the database specified by a database identifier returned by dbase_open. The