
mysql_dropdb, mysql_fieldflags, mysql_field-len, mysql_fieldname, mysql_fieldtable, mysql_fieldtype, mysql_ freeresult, mysql_listdbs, mysql_listfields, mysql_listtables, mysql_numfields, mysql_numrows, mysql_selectdb, mysql_tablename.

The MySQL extension was written by Zeev Suraski.

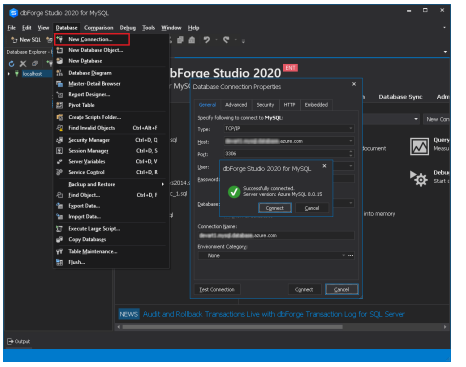

integer mysql_affected_rows(integer link)

The mysql_affected_rows function returns the number of rows affected by the last query made to the specified database connection link. If the link argument is omitted, the last-opened connection is assumed. If the last query was an unconditional delete, zero will be returned. If you want to know how many rows were returned by a select statement, use mysql_num_rows.

```
<?
  //connect to server as freetrade user, no password
  $dbLink = mysql_pconnect("localhost", "freetrade", "");

  //select the 'freetrade' database
  mysql_select_db("freetrade", $dbLink);

  //update some invoices
  $Query = "UPDATE invoice " .
    "SET Active = 'Y' " .
    "WHERE ID  100 ";
  $dbResult = mysql_query($Query, $dbLink);

  //let user know how many rows were updated
  $AffectedRows = mysql_affected_rows($dbLink);
  print("$AffectedRows rows updated.<BR>\n");
?>
```