
In this example, there are two queues, `payout` and `notifications`. The two are being processed at the same time by dedicated workers. Which is great, but what if something like that happens?

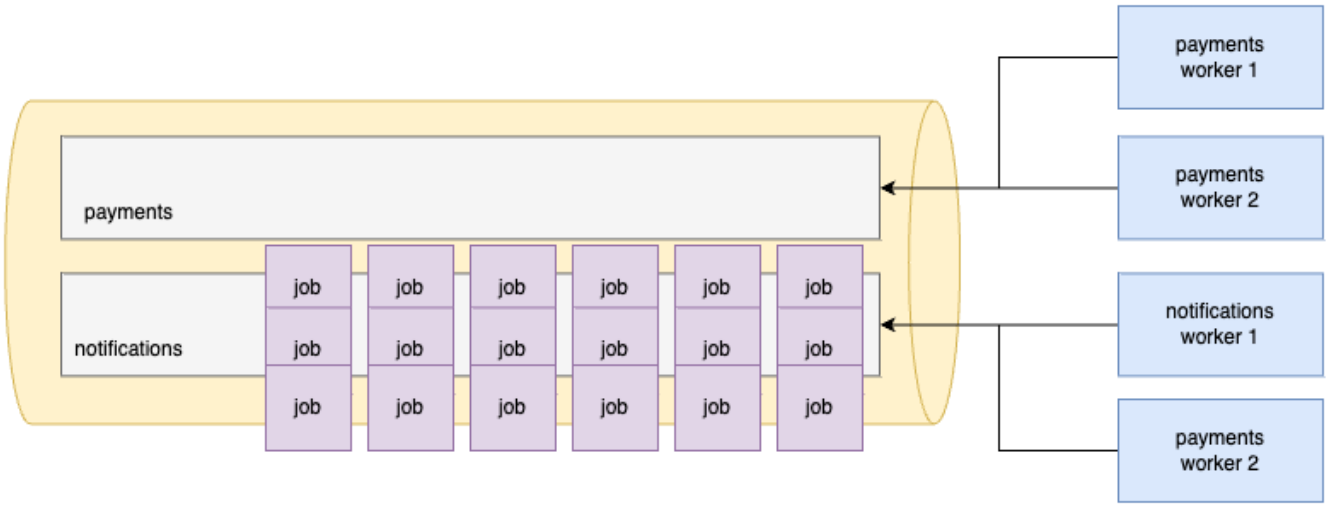

There are so many jobs in the notifications queue but none in the payout. If that happens we just waste all the payout worker processes since they have nothing to do. But this command doesn't let them process anything else:

```
php artisan queue:work --queue=payout
```

This means they can **only** touch the payout queue and nothing else.

Because of that problem, I don't recommend you to have dedicated workers for only one queue. Instead, prioritize them!

```
php artisan queue:work --queue=payout,notifications
```

The command means that if there are jobs in the payout queue, these workers can **only** process them. However, if the payout queue is empty, they can pick up jobs from the notifications queue as well. And we can do the same for the notifications workers:

```
php artisan queue:work --queue=notifications,payout
```