```
<?php

$method = $_SERVER['REQUEST_METHOD'];
print "HTTP request method: {$method}" . PHP_EOL;
```

… and we're now ready to make an HTTP request to fetch it. We'll use a common *nix CLI utility called `curl` for this…

```
$ curl http://localhost:8080/index.php
HTTP request method: GET
```

… but you could also use a web browser if you prefer. Remember to enter the full `http://localhost:8080/index.php` URL into the browser address bar: Most browsers will default to the `https` scheme, and PHP's `cli-server` will not handle HTTPS requests. You should see the following response:

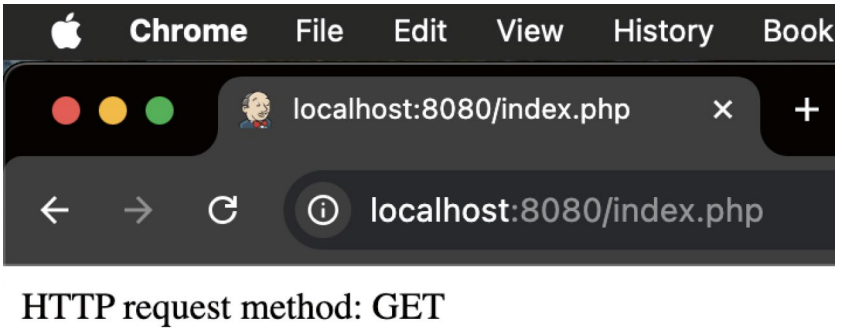


Figure 11-1. *Successful response page*

In either case, you will have `HTTP request method: GET` in the output, and if you check the terminal running the PHP `cli-server` process, you'll see some log data too:

```
[...] 172.17.0.1:50752 [200]: GET /index.php
[...] 172.17.0.1:50752 Closing
```

Notice the line that contains the method `GET` and resource path `/index.php` – the `[200]` part indicates the HTTP *response code* (which, in this case, is `200 OK`, shorthand for "the request completed successfully," more to come on these messages soon). We can also use `curl` with an option to easily change the request method: