```
{
    "id": 1,
    "price": 1200,
    "stock": 5
}
```

- Click `Send` to update the product.
- You should see a JSON response with the updated product details.

For deleting a product, for instance, we want to delete the product with ID `1`. You can perform this test:

- Set method to `DELETE`
- Set Url `http://127.0.0.1:8000/api/products/1`
- Click `Send` to delete the product.
- You should see a JSON response confirming the deletion.

Test with cURL

We also test the API using `CURL` commands. Here are some examples:

Create a product:

```
curl -X POST http://127.0.0.1:8000/api/products \
     -H "Content-Type: application/json" \
     -d '{"name":"Phone", "description":"Smartphone", "price":500, "stock":50}'
```

Get all products:

```
curl -X GET http://127.0.0.1:8000/api/products
```

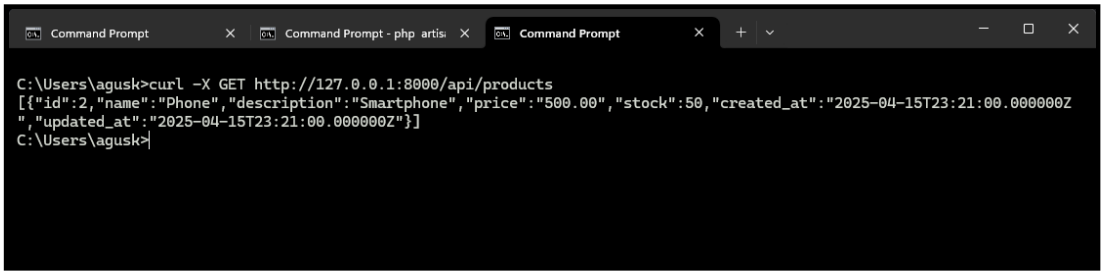


Figure 14.10: cURL to get all products.

Update a product:

```
curl -X PUT http://127.0.0.1:8000/api/products/1 \
     -H "Content-Type: application/json" \
     -d '{"id": 1, "price":1200, "stock":5}'
```

Delete a product: