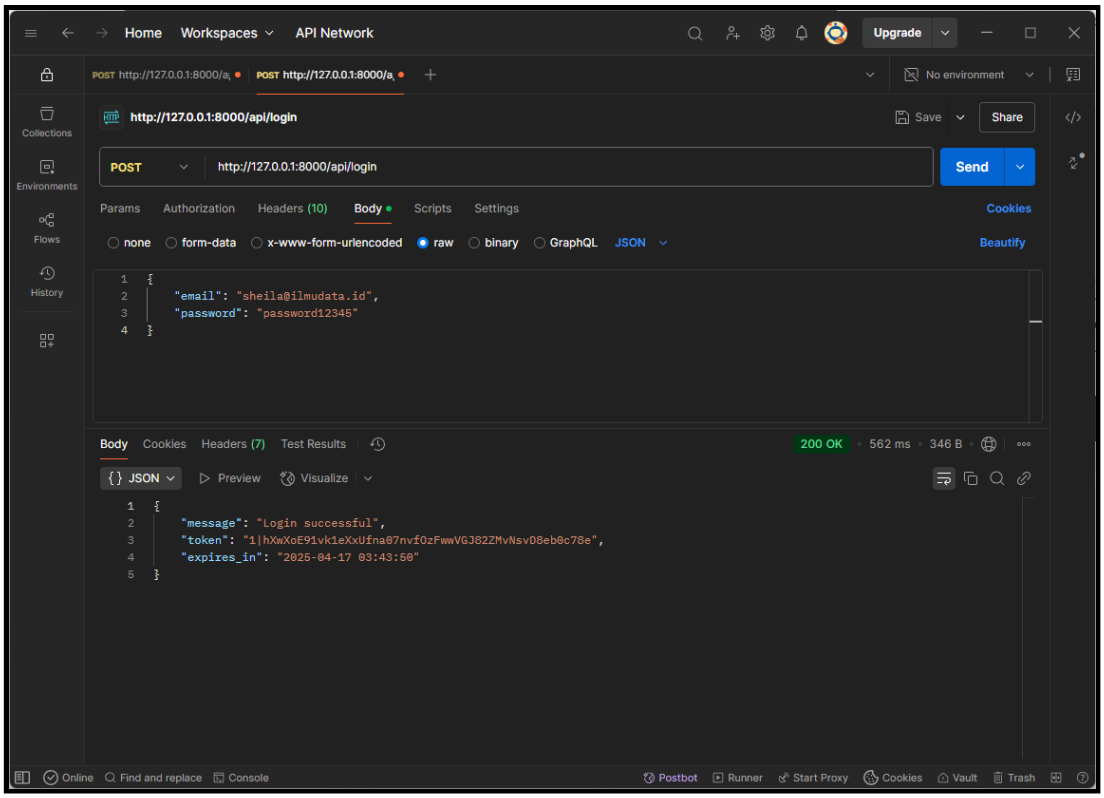


Figure 14.14: Getting token after login.

Access Profile API (Protected)

To access the profile API, you need to include the token in the request header. You can run this command in your terminal:

```
curl -X GET http://127.0.0.1:8000/api/profile \
     -H "Authorization: Bearer YOUR_TOKEN_HERE"
```

Change `YOUR_TOKEN_HERE` with the token you received from the login response.

Here is an example of how to set up the profile request in Postman:

- **Method:** GET
- **URL:** `http://127.0.0.1:8000/api/profile`
- **Headers:** `Content-Type: application/json`
- **Headers:** `Accept: application/json`
- **Headers:** `Authorization: aBearer YOUR_TOKEN_HERE`
- Click **Send** button to send the request.

You will receive a response from server about user profile.