Debugging Responses

The **`dump`**, **`dumpHeaders`**, and **`dumpSession`** methods can be used to inspect and debug the response content after submitting a test request to your application.

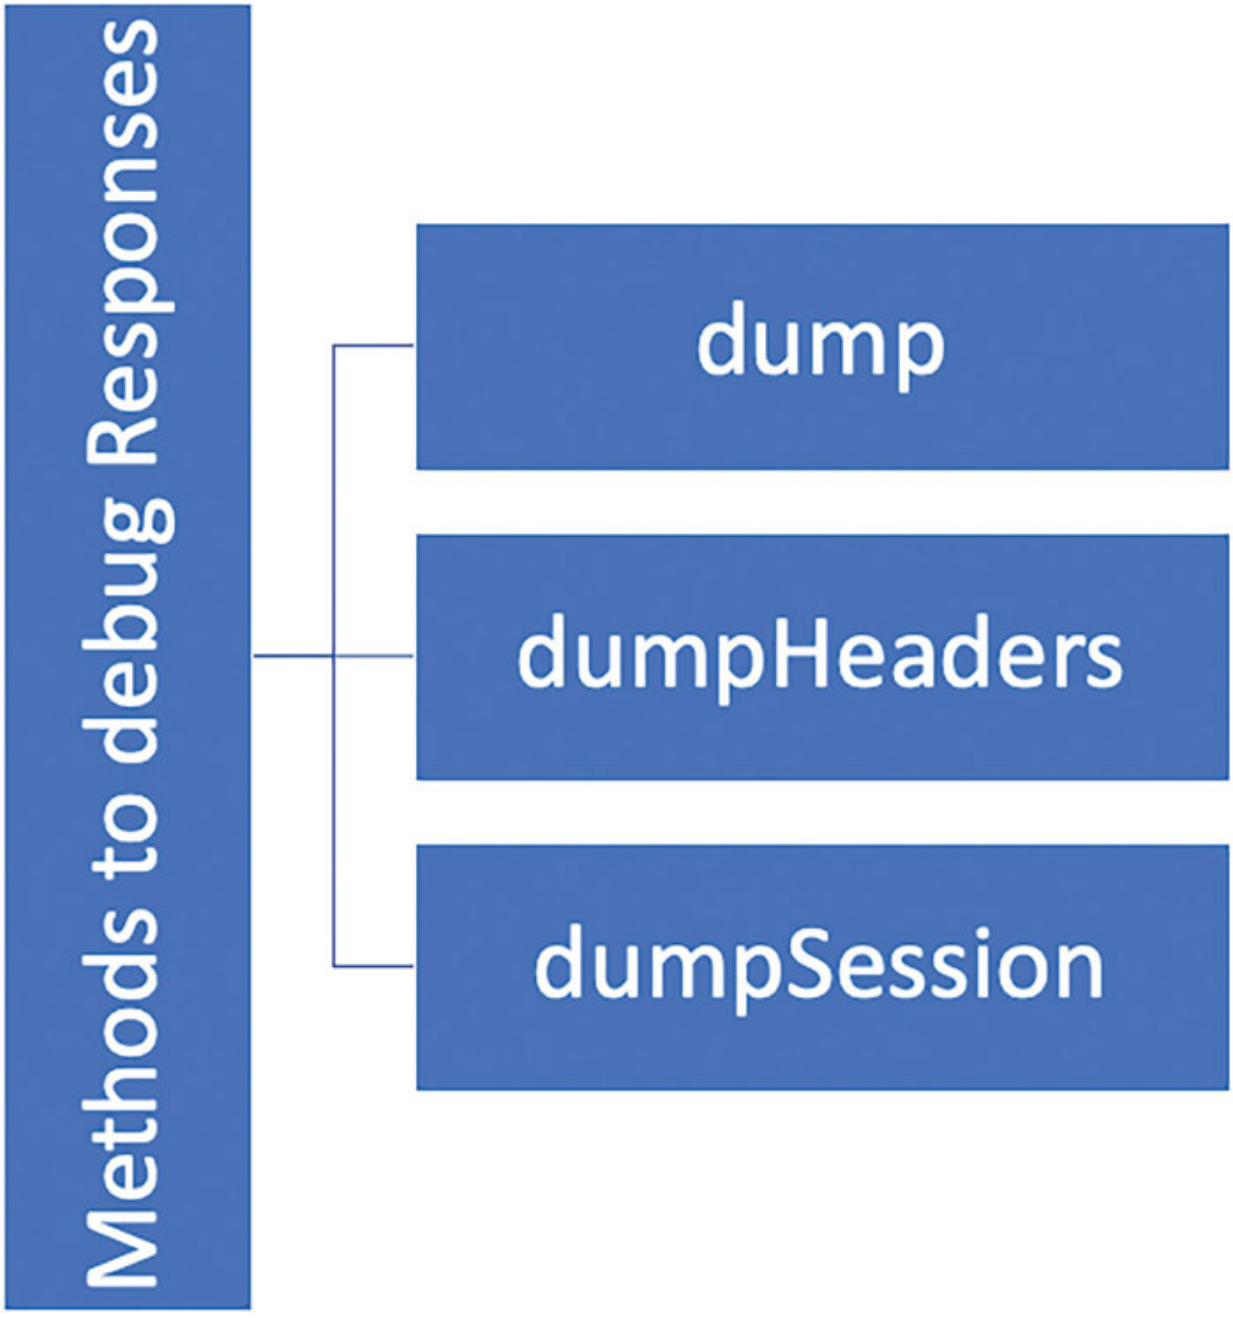


Figure 8.2: *Methods of debugging response*

Let’s look at an example: