As required, the namespace delimiters and slashes are automatically inserted into URI prefixes.

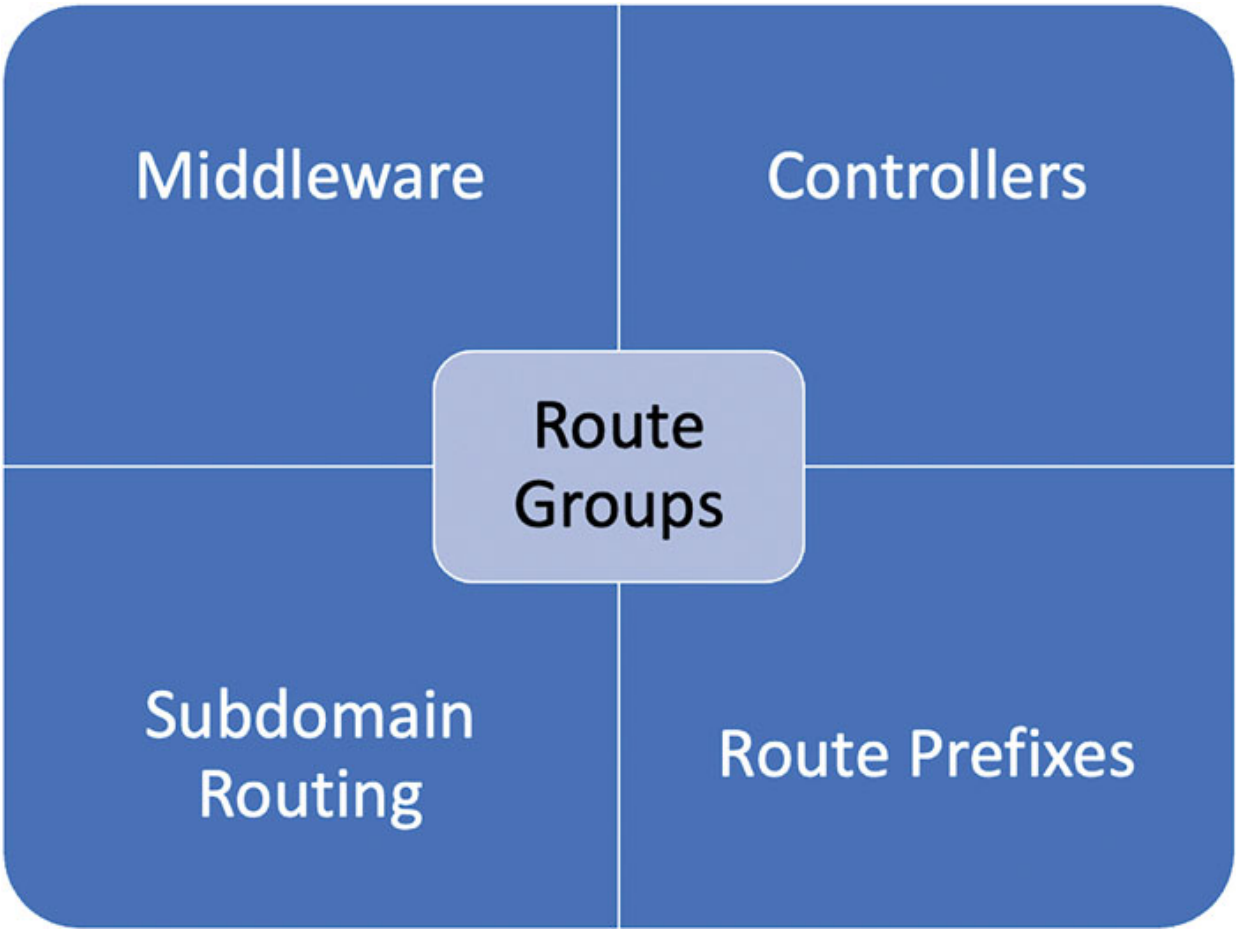


Figure 3.4: *Route Groups*

Middleware

You can use the middleware method before declaring the group to assign middleware to each route within it. The middleware is executed in the array in the following order:

```
Route::middleware([‘m1’, ‘m2’])->group(function () {
  Route::get(‘/’, function () {
    // Uses m1 & m2 middleware
// Code Logic
  });
  Route::get(‘/city/pollution’, function () {
    // Uses m1 & m2 middleware
```