


redirect these mail to specific folders that you may have set up.

For this, click on **Settings > Configuration** in KMail. If you have already added accounts, you need to modify very little to get the above things working.

Combating spam with KMail Bounce feature

Most e-mail clients tend to have filter rules for combating spam, but you know that many times these filters are of no use

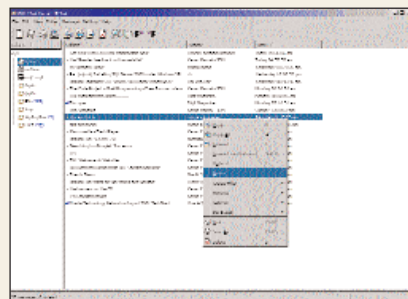

Remove spam using Kmail Bounce

and you are bombarded with spam from all over.

KMail uses quite a different feature to combat spam mail. It uses a feature known as Bounce, wherein when you receive a spam mail, you can opt to send a reply to the spammer with the subject 'mail not delivered' because of different reasons. The reasoning is that the spam list will automatically remove you from the list if it gets a 'mail not delivered' message. To access this feature, go to the Message options in the KMail toolbar.


Automatically checking e-mail

Instead of opening Netscape Mail or KMail and keeping it on all the time, you can use the mailcheck applet to notify you of new mail. Right-click on the Gnome panel, and choose to **Add applet > Network > Mailcheck**. Click the middle mouse button to access the mailcheck properties.

You have six sections here: the **Execute** option runs a program before checking for new mail. When new mail arrives, using the **Execute** option, you

can specify that the program you want opened should be the mail client that you are using.

You can specify the time lapse before checking for new mail, and also tell it to play pre-defined sounds or animations when new mail arrives. The mailbox option is where you give in details of your POP3/IMAP account such as your username, password and the servers.

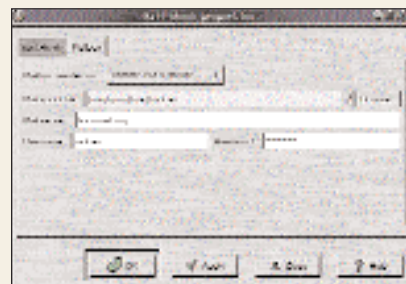


Use mailcheck for new mail notification

Making Konqueror assume Netscape's role


Many sites check the browser you are using and render pages according to the browser. You can set Konqueror to appear like Netscape to such sites. For this, open the KDE Control Center and select **Web Browsing > User Agent** and add the desired user agent.

Running Java applets in Konqueror

To run Java applets even within Konqueror, browse a Web page and then in the Konqueror menu bar, go to **Settings > Configure Konqueror > Konqueror Browser** and select to run Java applets.

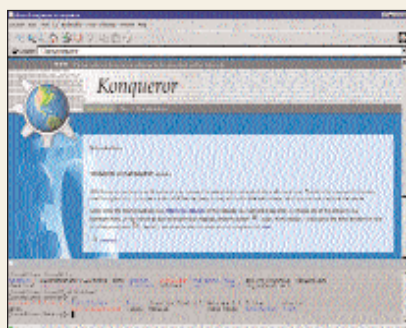

Konqueror: An alternative browser

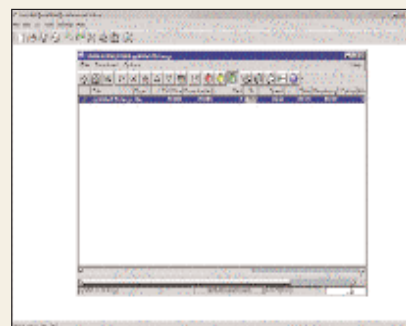

Working with WebDownloader

Download managers for X

You can use download managers such as WebDownloader with your browser. This particular program can download almost everything automatically and is faster and more stable.

Just paste the link in WebDownloader and watch the download happen. Even if you get disconnected, it has the ability to resume from the point it stopped.

Faster Web browsing

You know that you can always browse faster using IP addresses than domain names. Linux has several methods of converting IP numbers and domain names, and the most common is the `/etc/hosts` file that contains the IP address and the corresponding domain name.

Also, if you install a DNS server locally, you will be able to process requests faster. But even without the DNS server, the `/etc/hosts` file helps since your system will check this file first for the known domain name to IP address resolution. Editing this file is quite simple, and all you have to do is add the IP number, name and any aliases to this file. You can also use a script that will automate the adding of addresses to the `/etc/hosts` file. Use the following command: `#!/bin/bash HOST="$1" IP=$(host "$1" | cut -f3 | head -1) ALIAS="$2" echo "$IP" "$HOST" "$ALIAS" > > /etc/hosts.`

You can just invoke this by using the domain name and an alias if you want. For example, `./hostit thinkdigit.com d`, will add the site thinkdigit.com with the alias d

Ad will come