


நம்பவே முடியுமே!




*see offer on page 94-95

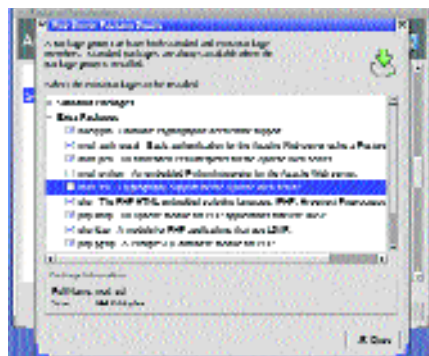

Select individual packages to install them

cation, first go to the particular category and select the respective sub-category. Click on Details to view all the packages in the sub-category. Select, or deselect the application here, and then press Close. You can now select or de-select the application, and click on the Update button. If the add, or remove process is

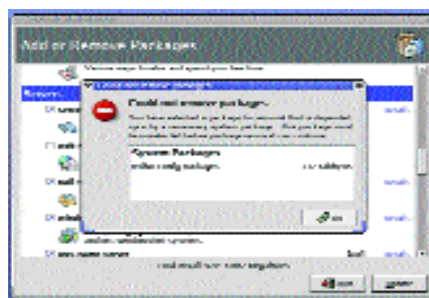

Dependency conflicts indicate conflicts between the add or remove process and another application

conflicting with some other application, then it will display a message box showing the dependencies. If there are no dependency conflicts, then it will update the necessary changes.

YaST2

YaST2 is the default Package Manager for SuSE Desktop Linux. To use the tool you will have to go to **System > Yast2**. You



Click on the install or remove software option to install software



Click on each package to view its details

will see the YaST Control Panel. Now, in the control panel, go to Software and double-click on 'Install or remove software'. Here, you can add or remove the application, depending upon your needs. As soon as you click on any application, it will show you the entire information about the package such as technical information, dependencies, and version, along with a short description of the package itself. The only disadvantage of this tool, with respect to default manager of Red Hat, is that it does not show details about the files within the package.

Nautilus

If you have a nautilus browser installed in your machine, then there is an easier way to find, or browse through the packages that are installed on your machine. All you do is type **'rpmdb:///'** in the Location box of the browser. You can view all the installed applications, as if you were browsing through your files.



View the package details in the Nautilus browser

Now, to find details about an application locate the application, and double-click on its icon. You will get all the details of the package such as vendor info, files, log and dependency information.

PRAVEEN KURUP and MUSTALI KACHWALA