



The CUPS Web interface lets you manage print jobs

Further, the Jobs option allows you to manage the print jobs in the queue. There is no button to add a print job; you can only manage the jobs using the Hold job, and Cancel job operations, which are provided as buttons.

Just like managing jobs, you have operations to manage your printers and classes. The Printers managing section lets you print a test page, start the printer, and perform other administrative tasks. It also shows the print job, and printer status.



Burn CDs on Linux

With CD-Writer prices falling rapidly, users are now switching to CD-Writers, instead of CD-ROMs. A CD-Writer's performance depends on the CD-Writing software being used. Traditionally, Linux only supported command line tools, to burn CDs, but now easy to use, graphical tools, such as gcombust, are available.

gcombust is a graphical user interface for traditional tools such as mkisofs, mkhybrid, cdda2wav, cdrecord, and cdblabelgen. Some of the features of gcombust are burn CD on the fly, iso image creation, Audio CD creation, Print

CD-covers, multisession support, and bootable CD support.

Since the gcombust package is available in the gz format, follow the steps shown previously to install it. When you execute the software for the first time, it will show you an error that says 'Configuration file not found'. Press OK, and then set the configuration in the Preferences window that opens up. You have to set these settings only once; hence forth you can directly get to the task of CD Burning. To burn a CD, go to the Data Files tab, and press the Add Directory button to add files, or folders.

Once all your files and folders are added, go to the Burn tab. Uncheck the




gcombust gives you continuous output during the burn process


'Dummy test run' checkbox, check the Burnproof checkbox, and then the Multi Session checkbox (if you wish to create a multi-session CD). Finally, press the Combust! button.

If you cannot locate your drive, use the 'Detect SCSI drive' button, and verify the drive, using the 'Check SCSI settings' button.

Most graphical utilities, such as gcombust, use a command line utility to accomplish their task. So, knowing how command line utilities operate is a great

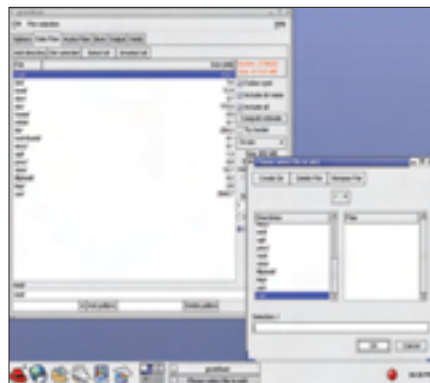

Click on the Add Directory button in the Data Files tab, to add files and folders

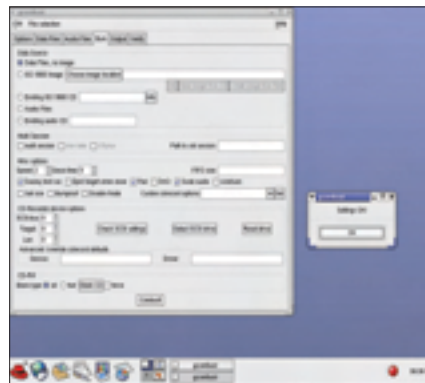

Uncheck the Dummy test run checkbox in the Burn tab

BONUS TIP 4

Convert your MP3s to OGG

MP3 is the most common music format in use today. But, it is involved in legal issues. Converting to and from MP3 involves payment of royalty for encoding or decoding. On the other hand, ogg is a format that's free to use—a open source project which provides the same quality of sound at half the file size, thus reducing the disk space required to store your music. One of the easiest ways to convert MP3 to OGG is by using scripts.

The mp32ogg script is in Perl, available at <http://freshmeat.net/projects/mp32ogg>, and the pre-requisite is that you need to have the mpg123, and the oggenc packages installed on your PC. You will also need a couple of Perl modules that go by the names MP3::Info, and String::ShellQuote as well. Once, you have these, execute the Perl script named mp32ogg by typing **mp32ogg *.mp3**.

This will convert all the mp3s, within the current directory, to the ogg format, and create a new file with an ogg extension, for each mp3 file. Existing mp3 files are not affected, so relax while the conversion takes place.

help. In the command line, each burn process is two fold—first, create an iso image, then burn the iso image on the CD. To make an iso image, execute the following command:

```
mkisofs /home/user > /tmp/user.iso
```

Make an iso image from a CD using **dd if=/dev/cdrom of=/tmp/img.iso**

Burn this iso image on a blank CD by executing the following command:

```
cd-record -v speed=12 dev=0,0,0 -data img.iso
```

If you wish to write to a re-writable CD, after erasing its content, type:

```
cdrecord -v speed=12 dev=0,0,0 blank=fast -data img.iso
```

Check the files in the iso, by directly mounting the iso file. For example, create a folder, say /mnt/iso. Then, mount the iso file by typing:

```
mount -o loop,ro -t iso9660 ./img.iso /mnt/iso
```

You can then browse through the image content, as you would with your CD-ROM drive. If there are any problems with the image, delete it, and create a new one. 

PRAVEEN KURUP (praveen_kurup@thinkdigit.com)

MUSTALI KACHWALA

(mustali_kachwala@thinkdigit.com)