


Select the entry to find the Groups currently in your system. Double-click on any group to see the members of that group. You can add a group by right-clicking on the right pane, and selecting New Group. Now, create two groups and name them Accountants and Designers.

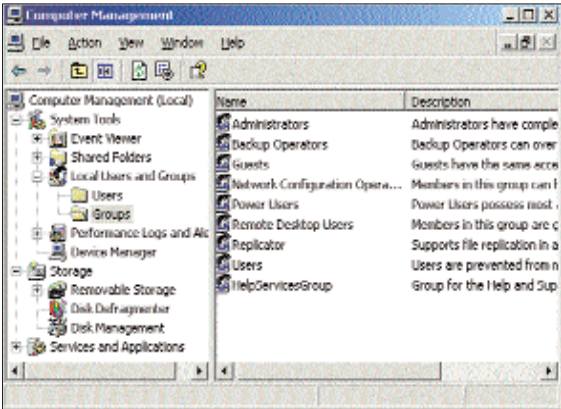

For the advanced users, Computer Management console is the place to create users and groups

Next, click Add to add users to the corresponding group. Then, select the Users group, and remove the users that you created, so that they remain exclusive to one group. If any user is a member of more than one group, then that user will have the least rights of both the groups. For example, assume that a user is a member of two groups—one of which permits the execution of a specific application, while the other doesn't. In this case, the user will not be allowed to execute that application.

Assigning permissions


After creating the users and grouping them, you can assign specific rights, and privileges to each group. Before that, you need to know about the different file permissions. Each NTFS partition will have some permissions associated with it,

describing the rights of the users over the partition. Similarly, each folder will have some permissions associated with it. To view the permissions of the partition or the folder, right-click on it, select Properties, and then select Security. Note that you will not be able to see the Security tab if simple file sharing is enabled. In Properties, you will see a list of users and groups. Select any entry in this list to view its corresponding permissions at the bottom. These are the permissions for the partition. Any folder that is created in this partition will inherit these permissions. Similarly, when you create any sub-folder, it will inherit permissions from the folder in which it is created.

Now, create a folder where the designers can keep their documents securely. Assign permissions by using the 'Allow and Deny' checkboxes. If any checkbox is greyed, it means that permission has been inherited from the parent folder or partition. To pre-



Use the Allow and Deny checkbox to give specific permissions

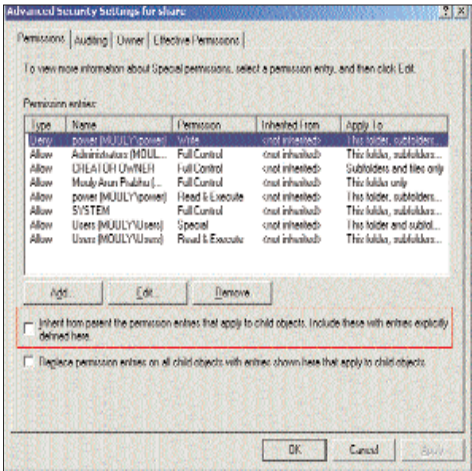

Uncheck this checkbox to disable the inheritance of permissions from Parent

The Keymaker

Whenever you create a user in the system, the operating system generates a random key that can be used to encrypt files and folders.

To encrypt a file, right-click on it, go to **Properties > General > Advanced**. Here, select 'Encrypt contents to secure data'. Note that if you remove the user after encrypting the data, you won't be able to retrieve it. Even if you create another user with the same name, retrieving data will not be possible, since it was encrypted using a random key. Hence, when you encrypt the data, take a back up of the certificate, which contains the random key.

Go to Run and type 'mmc'. In the MMC window, navigate to **File > Add/Remove Snap-in...** Under the Stand-alone tab, click ADD. Select Certificates,

click Add, Finish, Close and then OK, on the respective 'Add to...' windows that pop up. Select 'My user account', click Finish. Then click Close on both the windows.

In the left pane of the MMC console, navigate to **'Certificates - Current User' > Personal > Certificates**. In the right pane, right-click on the user name whose certificate needs to be backed up. Select 'All tasks' and select Export.

Follow the instructions in the Certificate Export Wizard to export the certificate and the associated private key to a .pfx file format. You will be asked to password-protect your keys (it will be verified when imported later).

Run this PFX file before opening the encrypted file.

vent inheritance of permissions, in the same Security window, click on Advanced. Here, uncheck 'Inherit from parent the permission...'; You will be asked if you want to copy the permission from the parent so that you can modify them, or if you want to give the permissions from scratch. Click 'Copy' to select the former option. In the 'Groups or user names' list, select users group and remove them. Now, click Add and enter the group name 'Designers' in the 'Enter object names to select:' field. At the bottom of the window, you can assign specific rights to the groups. There will be corresponding Allow and Deny checkboxes, for each type of permission. Although they are mutually exclusive, it is recommended that you use the Accept checkbox to assign permissions, i.e., select Assign if you want to give the permission, and uncheck it if you don't