


DirectX 11 title

The upcoming first person shooter Metro 2033 will be available as a DirectX 11


Ubisoft DRM

Ubisoft's new DRM to require gamers to be connected to the net while playing games

Developer corner

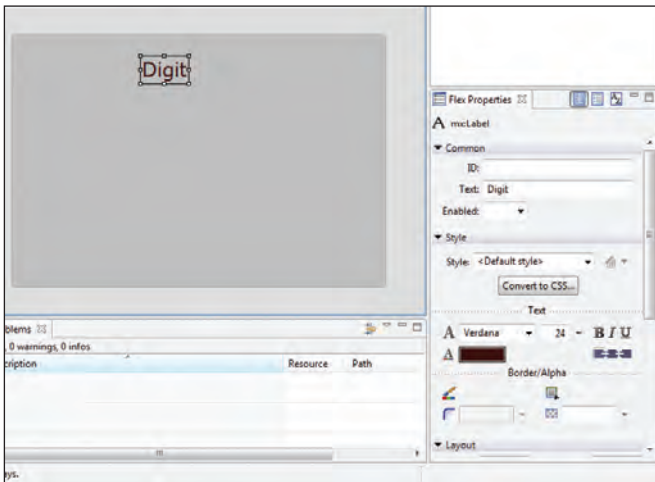

Label Control and its properties

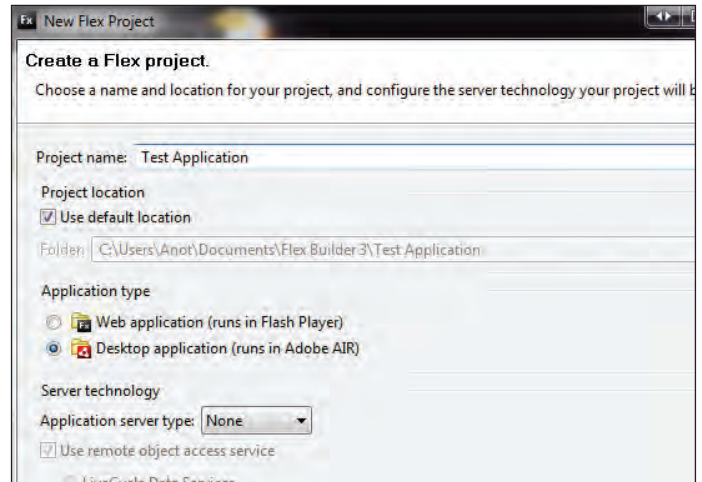

Setting parameters in your AIR project is easy

Building blocks

Start by creating your first Flex Builder project for Air and also get familiar with the user interface. Type in the project name, and make sure you select 'Desktop Application (runs in Adobe Air)' in the Application Type.

Click on Finish to generate your project. It will open in the source view. In the top pane, click on Design button to switch to Design view.

Let's break down the Flex Builder Interface and go over one pane at a time. In the upper left, you will see the Flex Navigator pane. It will contain all your projects in a folder tree type view. The source folder contains the MXML file that was generated when we created our project. The XML file in the same folder contains details about how the application runs in Adobe Air like the initial window size and how the window looks. The bin-debug folder is where your application will be compiled to when you debug or test it.

Below the Flex Navigator pane, is the Outline and Components pane that contains the visual controls that you can use in Flex and Air applications. To add these controls to your application, you can simply click and drag them out onto the design area of your application. The layout button contains different visual controls that will

organise visual components of your application. The charts folder contains components that facilitate display of data in a visual way using charts.

On the right hand side of the window, there is the states pane that is used to define the different view states for your application and to add and remove components many at a time. Below this is the Flex properties pane that shows the editable properties of whatever is selected in the Design pane. The bottom pane is the Problems pane. This

pane will display the details and the line numbers of the problems that may come up in your application. This will be used pretty frequently while debugging.

simplest is the Button control. Drag it and add it on the Design stage. In the Flex Properties pane, you will see that the button has an ID, Label and some options regarding where the label is placed and what happens when the button is clicked. Like the other MXML controls, you can set various style properties also.

The image control lets you specify a source for your image and then display it in your application. Its very similar to the HTML image tag. The RichTextEditor control will enable users to enter text and also style it by changing the font or colour. The TextInput control is a single line text input control, and will be used very frequently in most applications.


The checkbox control is used when you want people to select either a Boolean type Yes or No or if you want them to select multiple items from a



Adding user interface controls

Let's begin by dragging the Labels control by dragging it from the Components pane and dropping it onto your application in the Design view. The text entry box for this component can be accessed in the properties pane when this control is selected. You can also choose different fonts and styles for your text in the same pane.

One of the most commonly used controls and one of the

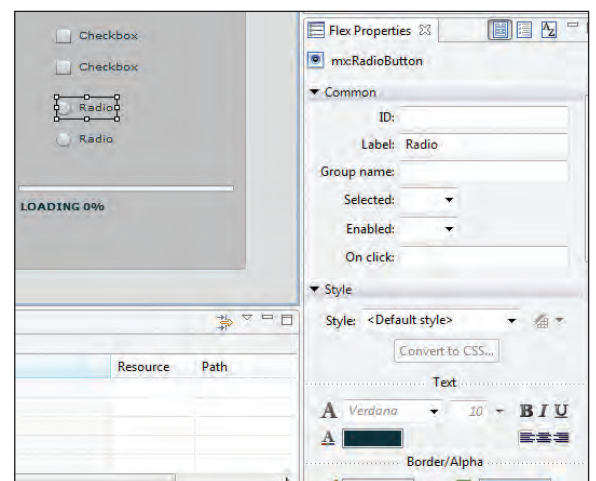

Properties and layout of Radiobuttons and Checkboxes