

20th Birthday

The first Adobe Photoshop was released back in February 1990

reMail goes away

Google buys and discontinues reMail, an iPhone service that allows downloading mail without an internet connection

group of checkboxes. If you drag one of those onto the stage, you will find that the checkbox control consists of the box itself and a label. The RadioButton control is similar to the checkbox control. The RadioButtonGroup control lets you group different radio buttons together and associate them with another enabling functionality similar to the HTML Radio buttons, i.e., only one radio button among a group can be selected.

ComboBox control also has the same Data Provider property. When you drag it out onto the stage, it doesn't have any items. As you can see, it is your standard drop down box, the choices of which are populated by the data provider of the control. You can set it by using a Binding expression or by giving an array of values. In the properties pane, go to the Data provider text box and add the options you want to have within square checkboxes and separated by commas as follows: Windows, Mac, Linux, Other. The ComboBox will then get populated by the values we specified.

The DataGrid control is a table like view with columns and rows and also has the Data Provider property. It is very useful in database applications, or applications which have a large list of objects which you need to present to the user.

There is a DateChooser control which displays a small calendar and allows the user to select a date from

it. A similar control is the DateField control, which has a calendar button next to a text box for the user to click and choose a date.

One really interesting control is the VideoDisplay control that can be used to show a video within your application. You can even stream media from a compatible server. However, the video needs to be strictly an FLV file.


Different layout controls can be used to align your Component controls, add spaces and make your application look visually appealing.

Source view

When you switch to the source view of the application, you see the source code in MXML language of your application. You can even enter your Action Script code here.

For this, you use the CDATA tag as follows:


```
<mx:Script>
    <![CDATA[
    ]]>
</mx:Script>
```

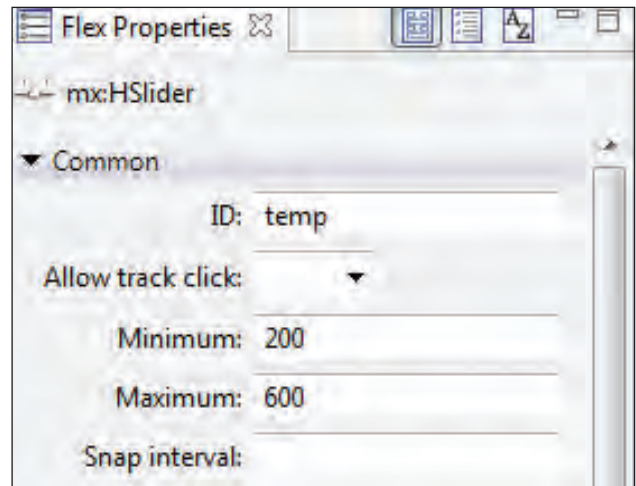

Using the properties pane on the right, give the horizontal slider an ID (temp) and give it a minimum value of say 200 and a maximum value of 600



The calendar for DateChooser control

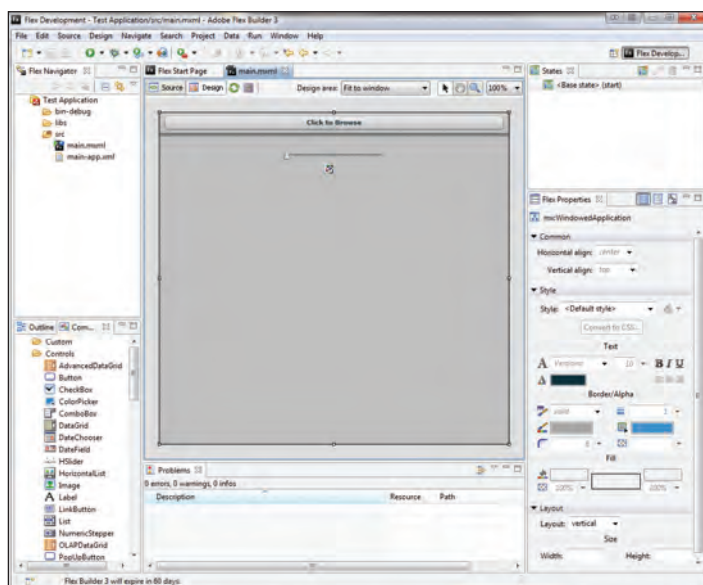

Click on the Green run button to test your application.

Data Binding in MXML

Simply put, data binding in MXML is tying a value of one control to the value of another control. To begin, let's delete all the existing controls on our application. The first thing we want to do for our application is to change the layout of our application from

absolute to vertical. To do this, navigate to source view and change the property in layout from **absolute** to **vertical**.

Next, let's switch to the design view and add the necessary components. First add the Image control to our application. Next add an HSlider control underneath it.

Also enable live dragging by choosing True in the dropdown box corresponding to the Live Dragging label.

Then select the Image control on the stage and switch to source view. What we will do now is bind the Image size of this to the value of the slider control. To do that, just change the width attribute of the Image control to {temp.value}. Curly braces are used in MXML to encapsulate the control you are binding to and its property. The temp is the ID of our slider and the property we want to access is its value in our case.

Next we will add a Browse button on