

Character translations

This allows you to preset changes that you'd like to make to characters. Let's say that all your digital camera images have the prefix DSC, and instead of cropping or deleting it, you would like it to be prefixed with Photo. Using **Options > Translations**, you may set them. That includes replacement for special characters like \$ and for any ASCII value. For example, to convert from capital A to capital B, you may use the following translations A=B, 41=42, 065=066, A=066, 41=066 and so on. You may use direct values, hex values or decimal values as in the example above. You may even convert pairs. Like every D,S,C = P,H,O,T,O. Of course, if you wish to convert a comma sign, you can't use the direct value, you'll need to use the Hex or Decimal value. Please note that Character Translations need to be reset every time, else they could tamper the rest of the renaming operations.

Drag and drop functionality

Bulk Review Utility has a drag and drop option. Using this, you may directly drop files from Windows Explorer onto the interface. This is useful when you need to process files which are different locations.

Sorting files and folders together

Since BRU works for both files and folders, there is no necessity of differentiating between the two while batch processing. Unfortunately, Windows Explorer sorts files and folders separately. This can be removed in BRU by going to **Options > Sorting > Sort Files and Folders Together**.

Save settings

This is useful if the same sort of rename operation needs to be done repeatedly. You can select the renaming criterion, including all the character translations, and then save the settings as a Bulk Rename Utility Favourite BRU file. Press **[Ctrl] + [S]**, or go to **File > Save**. You can later use these settings by going to **File > Open** and opening the BRU file. This is also useful if the operations are to be performed on different computers. One set BRU file can be transferred then, instead of recreating the settings.

Terminal

Today GNU/Linux has come a long way and you don't need to touch the command-line for performing everyday tasks, but if GUI is a little too n00b for you, here are a few tricks to make you a command-line ninja.

Watch videos


If static ASCII art is too boring for you try and watch a video in command line. Not only is it possible, it is very simple too. Install mplayer on a debian-based system. To do this, type `sudo apt-get install mplayer`

Then to watch the video, fire up a terminal and type `mplayer -vo caca filename.avi`.

If the above is not retro enough for you, you can watch it in black and white too `mplayer -vo aa filename.avi`. Works best for simple 2D animated content such as SouthPark.

Change your MAC address

So your university insists on infringing your privacy by tracking you via your MAC address, you can always be a step ahead by changing it to whatever you fancy. All you

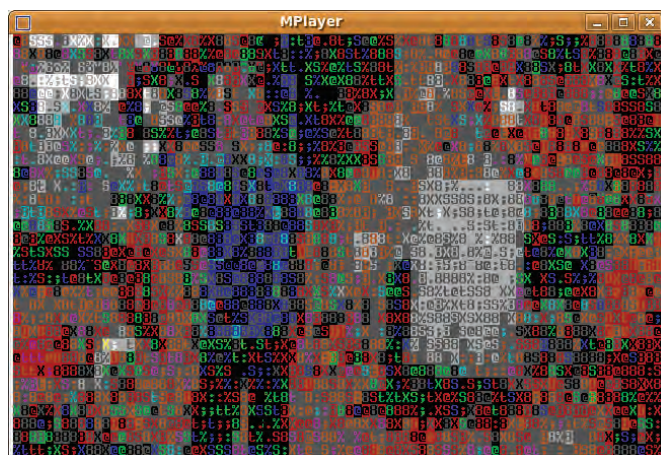

The screenshot doesn't do justice to the geeky glory of watching video in text

have to do is bring the interface down then use the hw ether switch to change it and then pull up the interface back again.

```
$ ifconfig eth0 down
$ ifconfig eth0 hw ether ff:ff:ff:ff:ff:ff
```

```
$ ifconfig eth0 up
```

Remember the MAC address will always be in HEX format.

Easy filesharing

Ever wanted to share a directory and its content quickly over the network? If yes, simply type `cd` in the directory you want to share and issue the following command:

```
$ python -c "import SimpleHTTPServer; SimpleHTTPServer.test()"
```

and everything under this directory will be served at the port 8000 via a new web server. So your friends can point at `http://YourIP:8000/` to access the content. When done, simply close the terminal window or press **[Ctrl] + [C]** to terminate the process.

Long commands

If you think you will never be able to remember the long command given in the above tip, you are right. This is where the role of "alias" comes in `alias short_name='command arg1 arg2 arg3'` For example you can first form the following alias, by issuing

the command in the terminal `$ alias share_dir='python -c "import SimpleHTTPServer; SimpleHTTPServer.test()"'` and from now you can just type `share_dir` to share your current directory over the internet.

Alias are generally stored in your `~/.bashrc` file, so you don't have to manually make them for each terminal session. If you ever want to use alias without its expansion you can use the `\` mark before it. For example, if you have an alias like the following `alias ls='ls --color=auto'` and want use `ls` without that `--color` option the you can issue the following: `$ \ls`.

Editing your .bashrc

The `.bashrc` file located in your home directory is the configuration file for your bash shell. It is executed every time you open a terminal window or invoke the shell. Therefore it is a great place to store your "alias". To open it, type the following and hit return:

```
$ gedit ~/.bashrc
```

You can use it for fun stuff such as displaying a message every time your shell is started or for more useful stuff as making your default startup directory as your Desktop folder instead of your home directory when you invoke