

EASE THE TASK



Beep on printer errors

Use this setting to enable the machine to beep every few seconds when a print error occurs. For local printers, go to **HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Print** and create or modify the DWORD entry called 'BeepEnabled'. A value of '1' enables beeps and '0' disables them.

For network printers, go to **HKEY_LOCAL_MACHINE\Software\Microsoft\Windows NT\CurrentVersion\Print\Providers\LanManPrintServices\Servers** and create or modify the DWORD entry called 'BeepEnabled'. A value of '1' enables beeps and '0' disables them.


Include Copy to and Move to in the context menu

When you right-click a file, you get a menu called context menu. This tweak shows you how you can add two useful entries to it, namely, 'Copy To' and 'Move To'. Therefore, copying and moving files can be done in 2 steps. To add the 'Copy To' option, go to **HKEY_CLASSES_ROOT\Directory\shell\ContextMenuHandlers** and create a sub-key called 'Copy

To'. Select the key you created and in the right pane, modify the value of the 'Default' entry to '{C2FBB630-297111d1A18C00C04FD75D13}'. Similarly, navigate to **HKEY_CLASSES_ROOT*\shell\ContextMenuHandlers** and create a sub-key named 'Copy To' and give the same default value as above. For the 'Move To' option, duplicate the above mentioned steps, but rename the sub-keys as 'Move To' and the Default values as '{C2FBB631-2971-11d1-A18C-00C04FD75D13}'. Now when you right click on any file or folder—except on the Desktop—you will get these two options.

Start button context menu

Using this tweak, you can open applications from the context menu of the Start button, i.e. by right-clicking on the Start button. Open the registry and select the **HKEY_CLASSES_ROOT\Directory\Shell** key. Create a new sub-key named after the program you want to associate it with, say, Notepad. Now select this key and create another sub-key named 'Command' and set its



Get the 'Copy to' in the context menu

'Default' entry value as the path to the executable for example, 'C:\Windows\notepad.exe'.

Make Google default search page


Google-holics ahoy! You can set IE to search using Google as default. Enter the search terms in the address and select the option that appears

below: Search for '<search terms>'. This will take you directly to the results page in Google. Open the registry and navigate to **HKEY_CURRENT_USER\Software\Microsoft\Internet Explorer\Main**; change the value of 'Use Search Asst' to 'no'; change the value of 'Search Page' to '<http://www.google.com>'; change the value of 'Search Bar' to '<http://www.google.com/ie>'.

Next, go to **HKEY_CURRENT_USER\Software\Microsoft\Internet Explorer\Search URL** and change the values of 'Default' to '<http://www.google.com/keyword/%s>' and 'provider' to 'gogl'. Then go to the **HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Internet Explorer\Search** key and modify the 'Search Assistant' entry's value to '<http://www.google.com/ie>'.

COVERING TRACES

95

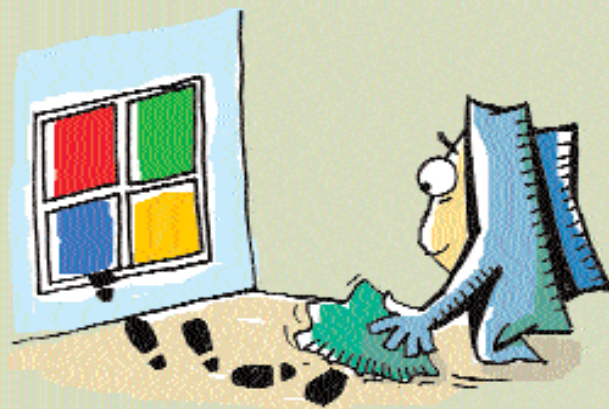

Selectively remove cached Run commands

Commands entered in the Run dialog box are automatically cached to be used again later as Auto Complete. You can selectively remove entries from the cached list of instructions. Go to **HKEY_CURRENT_USER\Software**

