

CATEGORY		DOMAIN HOSTING PLANS					
	Name	Cyquator	Net4Domains	e-Totalsolutions	Cenvo Hosting	Cybersitesindia	Compyter Village India
	Web site	www.cyquator.com	www.net4domains.com	www.etotalsolutions.net	www.cenvo.com	www.cybersitesindia.com	www.cvindia.biz
FEATURES	OS choice	Windows, Linux	Windows, Linux	Windows, Linux	Windows, Linux	Windows	Windows, Linux
	Database Support	All *	MS SQL,Ms Access	All *	All *	All *	All *
	Control Panel	✓	✓	✓	✓	✓	✓
	Webmail	✓	✓	✓	✓	✓	✓
	Domain Registration Choice (ccTLD/gTLD)	gTLD	gTLD	Both	Both	Both	Both
	Support	Phone/E-mail	Phone/E-mail	Phone/E-mail	Phone/E-mail	Phone/E-mail	Phone/E-mail
PRICE	Domain Registration -gTLD (in Rs)	600	495-510	500	350-400	369	99
	Windows Server (Rs)	3500	850	2000	500	850	1650
	Linux Server (Rs)	3500	650	1800	400	NA	900
	Extra for database	NA	2000	NA	NA	NA	600-2000
	Web Space (MB)	10	2	10	10	5+20	10+30
	POP3 Email ID/alises	10	1	5	20	2	3
	Auto Responders	Unlimited	NA	1	Unlimited	✓	Unlimited
	Mail Forwarding	Unlimited	Unlimited	Unlimited	Unlimited	✓	Unlimited
	Mailbox	10	1	5	20	2	3
	Data transfer (MB/Month)	500	Unlimited	100	1 GB/Month	150	NA
	Price Per MB (in Rs)						
	Windows Server	350	425	200	50	34	41.25
	Linux Server	350	325	180	40	NA	22.5

* MS SQL, MS Access & MySQL, ccTLD—Country Code Top-Level Domain, gTLD—Generic Top Level Domain

IES if the employees in your company are fewer than the number of mailboxes. Use them wisely. However, if employees outnumber mailboxes, just create a single ‘catch all’ account. A ‘catch all’ account is a master account that accepts messages for all e-mails IDs, even those meant for non-existent user accounts. Hence, you need not worry if you have fewer mailboxes.

However, if you select software that does not provide a sorting facility, you need to create similar accounts on the IES and the local mail server. You also have to manually configure each account on the local server to fetch mails from a similar account on the IES.

The advantage of having a single account on the IES is that you don’t have to manage users on two servers simultaneously. On the other hand, separate accounts on the IES lets the user check his or her e-mail directly from the IES, with the help of the provided mail interface—very convenient for those on the move.

Once the IES is ready with the necessary user accounts, people all over the world can start sending messages to your domain.

STEP 6 Now, set up a computer in your organisation as a mail server to fetch e-mails from the IES, and distribute them among employees. Use a mail server software for this. Choose one that has features such as remote POP and scheduling. The local mail server should also have a dial-up Internet connection.

STEP 7 Specify the registered domain name while installing or configuring the software.


STEP 8 Create user accounts for employees on this mail server. You can make them as you please—name@company.com, or name.lastname@companyname.com in case you have two people with the same first name.

STEP 9 Messages received are stored on the IES under a ‘catch all’ account. Configure the mail server software to download these e-mails from this remote POP account, and then distribute them amongst the different user accounts.


STEP 10 Next, configure the scheduling capabilities of the mail server so that it connects to the Internet at regular interval, for example, every hour.

STEP 11 Configure the SMTP server on the mail server to handle outgoing messages. By default, it forwards e-mails that need to go outside the organisation to the SMTP server on the IES. It should also sort and locally deliver messages pertaining to your own domain.

STEP 12 Enable the relaying facility on the SMTP server to forward

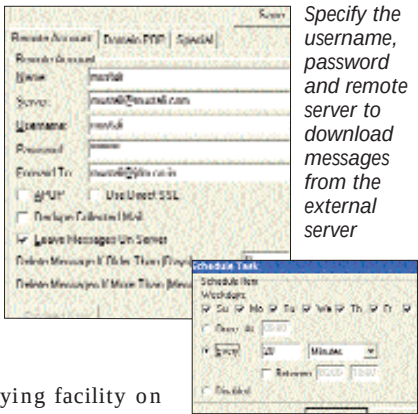

Specify the username, password and remote server to download messages from the external server

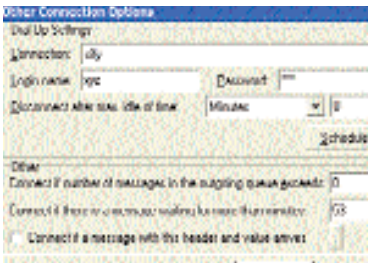

Select the dial-up connection, specify the username and password, and specify the intervals at which the dialler should connect

STEP 14 Finally, if you have problems with the delivery of messages locally, insert an MX record for the domain on your local DNS server. The MX record pair consists of the domain name, such as mycompany.co.in, and the IP address of the local mail server, such as 192.168.0.1. That’s it—happy mailing!

MUSTALI KACHWALA
mustali_kachwala@thinkdigit.com