


Finally! Starting up JabberD

Configuration setup; the install script generates the required (XML) config file, and brings you back to the Configuration Options screen.

Before starting the server, select the Users (User Administration) option. Next, select the reg (Registration Settings) option. First up, permit public registration

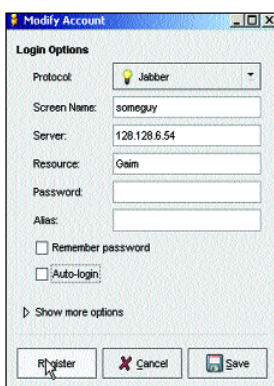

Register the Jabber account from within your IM client

to ease the task of setting up individual user accounts. The screen then asks you if it should inform the JabberD administrator about users making new accounts. This is recommended if you expect a lot of users

and their traffic, but for a small departmental chat server, choose No.

Finally, it regenerates the config file returns to the Configuration Settings screen. Now, scroll down, and select Start to kick-start your Jabber server. Discontinue running the setup.sh script once it informs you that the server is running by scrolling down and selecting Quit to exit. Confirm that the server is running by using the **'ps -aux | grep jabber'** command.

Fair Gaim

To use the new server, line up and distribute messenger clients. We used Gaim, which works well with RedHat 9, as long

TIP

If you have problems signing in, first confirm whether the JabberD server is running. Next, make sure that the server's IP address is mentioned correctly while setting up the account in Gaim—or whichever client you chose. Also, ensure that your PC is on the LAN and is working fine.

as you have resources to run the fancy, heavy GUI. We also installed the Gaim version available for Windows XP. You can use any client and tweak accordingly, but these directions are Gaim-specific.

Once installed, start Gaim and click Preferences. Since we just wish to run a local chat server and not access the Internet, make sure that your Network settings are appropriately set. We didn't indicate the proxy server address, since we ran JabberD on a Linux box using a local LAN IP address. Also, set other personalised settings in the Preferences applet here, and click Close.

Now, set up the Jabber user account. On the Gaim main (Login) menu, click on Accounts, and then click Add to open the Add Account applet. Choose the Jabber protocol from the protocol list drop-down box, and enter a screen name of your choice. In the server option, add the IP address of the Linux box hosting the Jabber server. Ignore 'Resource', and skip the password, for now. Finally, click Register.

A registration window pops up and you are prompted to enter in a new password and other details. Next, click on Register. If all goes well, a pop-up box informing you of successful registration appears.

Finally, sign into the account. Manually add in your buddies to start chatting.

Jabber's easy to set up, real fun and pretty addictive. If you desire connectivity with the rest of the world as well, choose to set up accounts with www.jabber.org. It takes at most 15 minutes to set up the Jabber daemon and clients.

IRC DAEMON (IRCD)

The very nature of IRC makes communication a snap. The channel (chat room) format lets you communicate with a large group or a select group at once, or even with a single user.

The most popular IRC daemons (IRCDs) are Unreal, Hybrid, Bahamut and MusIRCd. We'll show you how to set up MusIRCd easily, and connect instantly. The main reason we choose MusIRCd is its stability, low system load and ease of setup. There's even no need to load X—as with most *nix daemons, it's totally installed and run from a command prompt.

You don't even need root access to install and run this daemon; it can run your IRCd on any Linux PC that you have an account on.

STEP 9 Download the file from <http://musirc.sourceforge.net>. A safe bet is to download the stable build—musircd-

Slanging It

IRC users have developed their own language over time. Here's a list of words and their meanings, so that you won't be lost when chatting with someone on IRC:

Phr34k5: Phreaks; most IRC users like to call themselves cool anti-establishment names—whether or not they're actually capable of phreaking

Phreaking: Hacking into a telephone company or network to use their services freely—mostly to make free long distance phone calls

1337 (leet): Really cool; from 'elite'

H4x0r5: Haxors, or hackers

w007: Woot, an exclamation of pleasure; from 'root'

rotflmao: (Acronym) Rolling on the floor laughing my a** off

ne1: Anyone

sp33k: Speak

n00b: Newbie; this is generally an insult

l4m3r: Lamer, a synonym for n00b

5ux0r5: Suxors; something that just, well, sucks!

4013r: AOLer, meaning a person using an AOL dial-up connection; this is an insult, as IRC users pride themselves on their broadband connections

stable.tar.gz. So, use the **'wget http://musirc.sourceforge.net/musircd-stable.tar.gz'** command.

STEP 10 Use **'tar -zxvf musircd2rc3.tar.gz'** to uncompress the file. Type **'ls'** to view the newly created directory—musircd. Enter this directory by typing **'cd musircd'**.

```
> 'musircd2rc3.tar.gz'
Resolving musirc.sourceforge.net... done.
Connecting to musirc.sourceforge.net[66.35.250.209]:80...
HTTP request sent, awaiting response... 200 OK
Length: 461,440 [application/x-tar]
100%[=====] 461,440
18:29:05 (11.70 KB/s) - 'musircd2rc3.tar.gz' saved [461440]
[raaabo@Columbine raaabo]$ tar -zxvf musircd2rc3.tar.gz
```

Use the **'tar'** command to uncompress the downloaded file

STEP 11 Use **'./configure'** to configure the default install. We suggest that you configure the IRCd for small networks, as this optimises the system so it uses less memory for the IRCd—unless you're expecting thousands of users on your server. Type **'./configure --enable-small-net --prefix=/<Path>'**, where **'<Path>'** is the path to the folder you want to install the IRCd in. So, if you want to install the IRCd in, say, **'/home/raaabo/ircd'**, type **'./configure --enable-small-net --prefix=/home/raaabo/ircd'**.