

Software Works



3 Approaches to detect the viruses



The Heuristic approach

This analyses a program for 'seemingly' malicious behaviour. Heuristics is effective against undocumented viruses. The Buster of the future might eliminate the need for continual monitoring of new viruses


The Sandbox approach

A 'Sandbox' is an advanced program that emulates an OS. A suspect executable file is run within the confines of a sandbox, and then the sandbox is examined to see what changes were made. These changes are used to determine which virus infected the file



Physical removal of infected file

If the file is in use by the OS, a user needs to manually delete it (if it is a non-critical file), or manually replace it from a clean backup

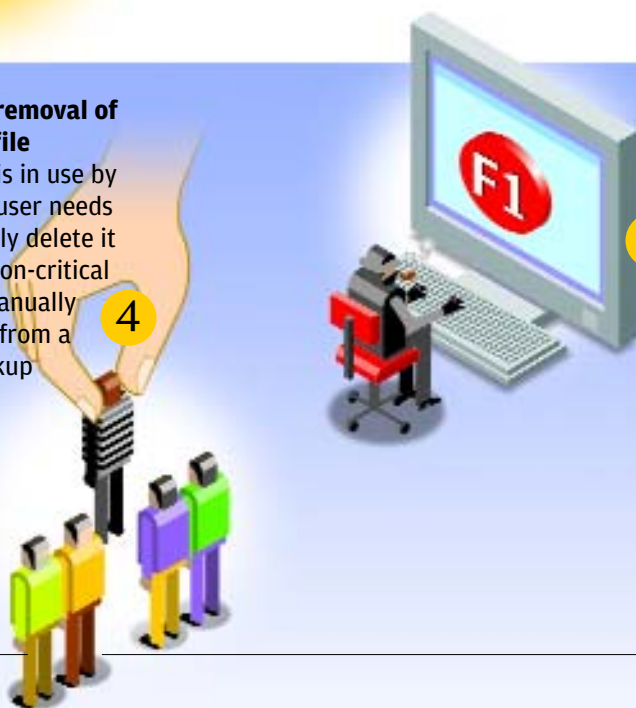

5 Seeking help

Viruses often make changes to the registry, and Buster can't always reverse these changes. In such cases, users are directed to the company's Web site, for help on what registry keys to change or delete

If these five methods fail, or if a critical OS file is infected, Buster boots via a secondary OS to access files being used by the infected OS