

downloaded ISO files or the one created in Windows will work. The last stage is to use the “**cdrecord**” command with the necessary switches.

Using CDRECORD For CD-R

You must know the speed of your drive; in our case it is 48x24x48, and also the speed that the CD-R is capable of handling. If the CD-R is 52x and the drive is capable of 40x, then you should burn at a max speed of 40x. And, if the drive is 52x and the CD-R is 32x, then the max speed you can record at is 32x when using “**cdrecord**”. The command with best preferred switches, in our opinion, is:

```
# cdrecord dev=0,0,0
gracetime=2 fs=8m
driveropts=burnfree,noforce
speed -v speed=24 -sao -eject
/tmp/isofilename.iso
```

What the switches mean:
dev=x,x,x: the target drive.
gracetime: the time interval within which you can cancel the execution of burn command
fs=#: the size on FIFO buffer. Number followed with ‘m’ gives size in MB

driveropts= options: there are many options of which we feel **burnfree** and **noforcespeed** are useful

burnfree: turns on buffer underrun protection

noforcespeed: Some drives force a selected speed even if the media is poor, thus resulting in poor write quality. This options allows variable writing speed depending on the quality of the medium.

-v: displays progress of disc writing
-sao: the same as **-dao**, i.e., Disc-At-Once
-eject: ejects the tray on completion or the writing process.

Playing MP3 On Linux

This is very easy provided you take the right download link. We searched in vain through most of the Linux software sites such as freshrpms.net; but all we could get is more dependencies.

To play MP3 on a Linux box, you need to install Xmms player which is a look alike of Winamp player. Download Xmms from softpedia.com: <http://linux.softpedia.com/get/Multimedia/Audio/XMMS-348.shtml>, because it is error free and installs without a glitch. On completion of download, use the command:

```
#rpm -ivh xmms-1.2.10-1.i386.rpm
```

and hit [Enter]

Xmms lists itself in the Start Menu under **System Setting > Multimedia > XMMS**. You can also use the command “**xmms &**” at the shell prompt to run it.

Using CDRECORD For CD-RW


There isn’t much difference in dealing with CD-RW except that you can erase the content of the media and the max writing speed doesn’t exceed 24x. So, check if the CD-RW media contains any important data before you proceed to erase it. To erase the disc:

```
# cdrecord dev=0,0,0
blank=fast
```

and then hitting



Winamp on Linux!

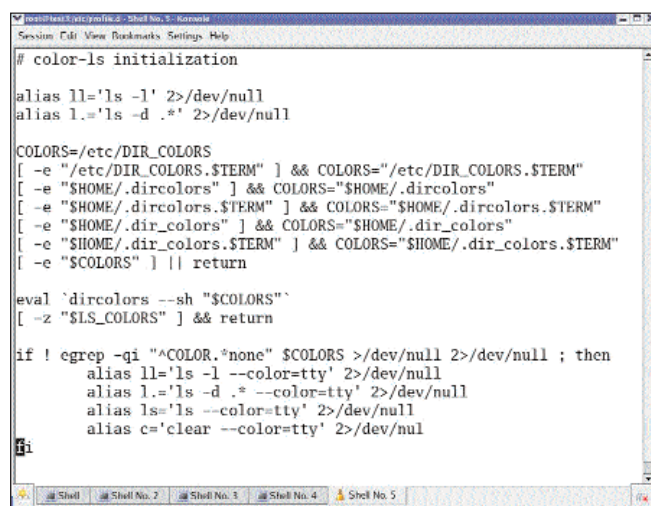

Creating a permanent alias

[Enter] is the fastest and most common usage. Alternate switches (blank=) are:


all: erases entire disc,
takes along time
track: erases a track
session: erases the last session
unclose: opens the last session

In order to write data to

the CD-RW, follow the instructions used in the CD-R, but take care to specify the correct writing speed. Check your Rewritable media for the maximum rewriting speed possible.

Creating Permanent Aliases For Commands

We use certain commands frequently; some are very long and irritating to type in again and again. You could use the ‘**alias**’ command to assign aliases, but the result is temporary. Let’s be smarter, hack a script file, and set permanent aliases for such commands.

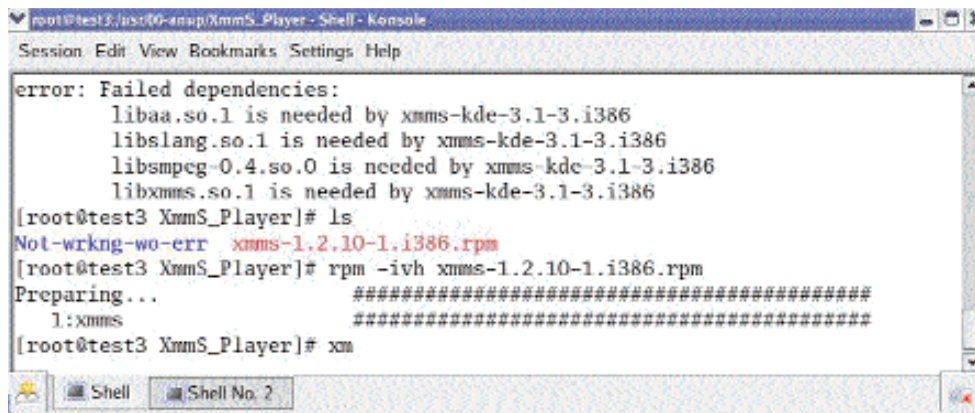

The list of commands that get executed when you’re trying to install Xmms

For our example, we’ll take the command ‘**clear**’. We use this command very frequently and many a time, it bugs one to re-type it! Let’s set ‘**c**’ to perform the function of ‘**clear**’. The temporary method is to use the command **#alias c=clear** and hit [Enter].

Change your directory to **/etc/profile.d** and open the shell script named ‘**colorls.sh**’ in a text editor. Look for the line “**alias ls='ls -color=tty' 2>/dev/null**” and copy and paste this line under itself. Now on the line pasted, replace ‘**ls**’ with ‘**c**’ and ‘**ls -color=tty**’ with ‘**clear -color=tty**’. The edited **colorls.sh** file should look as in the screenshot above. Now open the terminal or konsole window, hit [Enter], and then [C] to check if the alias works. The alias should work even if you reboot your machine. ☑