


jpg layer. Now it's time to animate Screen.jpg when you tap on Button.jpg. Simply, drag and drop any animation onto the Screen.jpg layer. We've gone ahead with Rotate.

Now in the animation panel, you should see the very first drop down menu that says "Based On". This is where you link the animation to the Button. Select Button.jpg in the first drop down and then select the action that triggers the animation. In this case, you only have the "Tap" interaction available. Now you have multiple parameters to define how the Screen.jpg layer rotates. Select a pivot point from the nine point menu and insert appropriate values for each axis. We went with 45 degrees in all of the axes. Below, you can see how the action plays out.

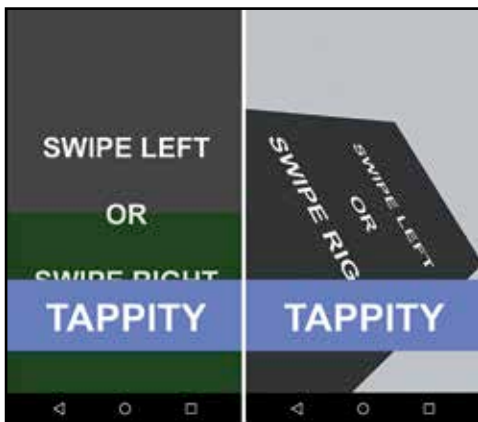

Tap to rotate in action

Moving between screens

Once you've gotten a hold of how animations work, you need to figure out how to switch between different screens. This is achieved by reordering and is ideally done simultaneously with an animation. When an animation on a layer has run its course, it still remains in its initial position. So all actions are still captured by the top most layer. In order for a newer layer to perform any action, the user should be able to interact with it directly and this is why you'd want to reorder the layers such that the new layer comes to the very top.

Reordering is just as simple as adding animations. Drag and drop the reorder animation onto whichever layer you wish to move and select the "Based On" parameter. Then select where the layer has to be moved to. You can choose to send it all the way to the back or bring it to the front. And if you prefer a more specific position, you can slot the layer behind/in-front-of element on the workspace.

Grouping

And now for something slightly complicated. Grouping layers allows you to work out some interesting effects. Here's how you can achieve parallax scrolling using grouping. Start off by creating two different layers with one layer being slightly

*pointers

>>Interesting developer news



What is Code?

>>This tutorial video combined with an interactive and comprehensive article explains what coding is all about.

<http://dgit.in/HwCodeWrks>



Build a chess game

>>Watch this tutorial series that consists of 95 videos teaching how to program a chess engine from scratch in the C language.

<http://dgit.in/ChessTut>



Wolfram Language

>>Stephen Wolfram introduces the Wolfram language, explaining how symbolic programming language can enable functional programming.

<http://dgit.in/WolframLang>




Google Shaka Player

>>A video introducing Google's Shaka Player for the web that optimises video playback according to your bandwidth, among its several features.

<http://dgit.in/ShakaPlayr>



smaller than the other. Drag the smaller layer onto the larger layer to nest it. You now have a parent layer and a child layer. And now, like we'd done earlier, you need to add a "Drag" interaction to the parent layer and pick 'Vertical' from the properties menu for drag limiter.

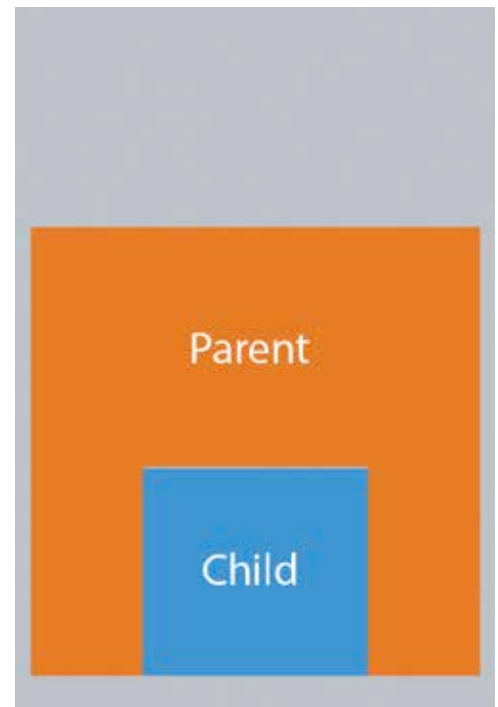

For parallax scrolling, you need to have one layer moving at a slightly greater pace than the other. In this case, the child layer will be made to move at a faster pace so that it comes into view and exits fairly quickly. So you need to add a move animation to the child layer and link its animation to that of the parent. Select the parent layer under "Based on" and for the trigger, select "Drag Position". Under animates, select "Continuously with rate". Now, the child layer will move in unison with the parent layer, so to change the pace, modify the "Rate" to 1.5 and you'll see the child layer zooming past the parent layer. If you want the child layer to not pop out of the confines of the parent layer, then simply select the parent layer and modify the "Clipping" property to 'bounds'. The child should now be visible only when within the bounds of the parent layer.

Go crazy!

These were just some basic examples for you to get started with Pixate. You can find more of these simple tutorials over at Pixate's official tutorial page and if you're in the mood for something a little more complex then you might want to check out this video to figure out how to build a Twitter prototype. <http://dgit.in/PixateTwitter> >