


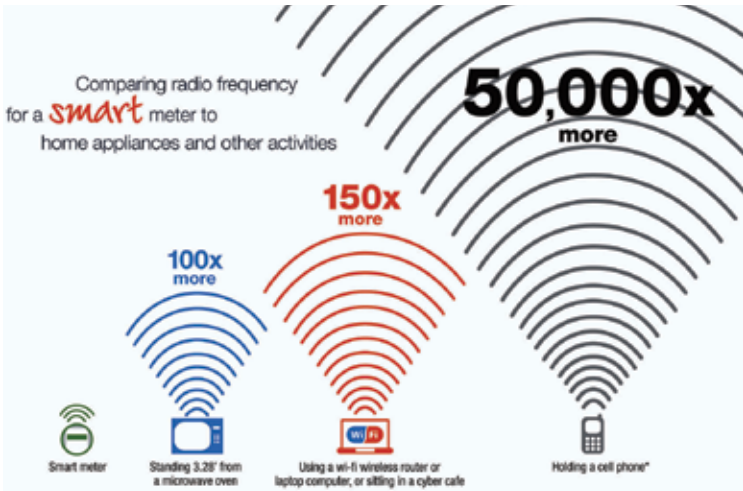

The variety of evolving wireless technologies currently in use today.

router to transfer data between devices. This is a version of peer-to-peer networking which is what the current conceptualisation of the Internet of Things is expected to be in the future. The data on such a network is limited in its size and range which makes it suitable for sensor data. The devices on a Bluetooth network form a personal area network or PAN and are also called a piconet. In this link, one device is the primary controlling device and can link with up to eight other devices who act as its slave. This means that in an Internet of Things household, a cell phone can work as the master of the major devices like the TV, AC, lights, media center, intercom and three other things, however it does drain power. This limitation is further absolved with the new Bluetooth Smart technology which has been specifically made for the Internet of Things. It is better in many ways including its low energy consumption rate, larger range over distance (200 feet) and customised management of device applications for overall efficiency.

Other devices for the Internet of Things are being designed with cellular network in mind. Its almost similar to different devices making phone calls to each other and trading information. And even though cellular technology uses types of radio waves, they are not routed through local hubs or even directly between devices – in fact, they travel across a global network of receivers and transmitters via cellular towers and base stations. This makes the range of things on the network infinite as long as there is a signal between