


money. The additional expenditures are also incurred if there is a change in the needs of the client or end users.

Iterative/Rapid Application Development

The Rapid Application Development methodology evolved from the Incremental and Iterative Development methodology of the 1980s, by James Martin in 1991. Though they are often classified differently, this general class of methodologies has the same features and relies heavily on prototyping. In terms of actionable stages, it contains the same basic ones, i.e. Planning, Analysis, Design, Build, Test and Deploy. The major portion of the body of the process (Analysis -> Design -> Build -> Test) is carried out iteratively, over many runs, to slowly build the product. Since even the iterations occur

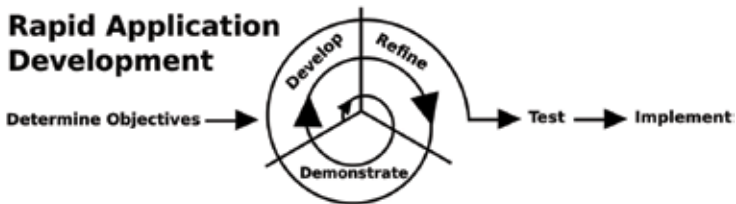

Rapid Application Software Development

in a linear fashion within themselves, this method is also referred to as Iterative Waterfall Development.

The main objectives of this type of development method are to reduce production and development time, deliver a high quality product that satisfies the business needs, and achieve this at a lower total cost. As the process centers around the evolution of the prototype, changes are easier to incorporate at every level, and the mistakes of a cycle serve as a lesson for the next iteration. Rapid Application Development is managed by a Project Manager, who's job is to ensure that the iterations are produced within the delivery deadlines or timeboxes. When potential delays are apparent, the requirements are reduced to fit the timeboxes but the deadline is never extended.

Agile Development Methods

In February 2001 a group of seventeen software developers met at a retreat in Utah with the aim of creating the one methodology to rule them all. There