

```

• func parser(parser: NSXMLParser!, didEndElement ele-
mentName: String!, namespaceURI: String!, qualifiedName
qName: String!) {
• if elementName == "item" {
• let blogPost: BlogPost = BlogPost()
• blogPost.postTitle = postTitle
• blogPost.postLink = postLink
• blogPosts.append(blogPost)
• }
• }

```


Creating the main view table

Now that we have set up the parser and sifted through the XML feed to generate the array, we need a way to display the entire thing on the main view. To do this, locate the Table View Data in the source section and remove the comment line in `numberOfSectionsInTableView` and add a return value of 1 to it.

```

• override func numberOfSectionsInTableView(tableView:
UITableView!) -> Int {
• return 1
• }

```

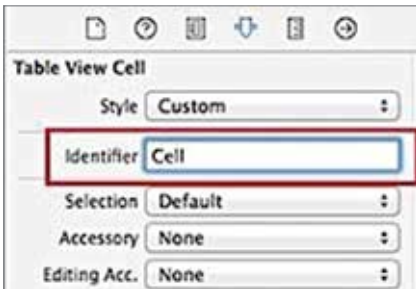

Now depending on the CMS that generated the XML feed, you will have a varying number of entries in the `showArts` array. WordPress, by default, generates 10 items per XML feed but your favourite site could be generating a lot more. So the question arises as to how many of these entries can you show in

the main view table. We shall simply display all the posts in the `showArts` array. To do this, locate `numberOfRowsInSection` and update the number to match the number of elements in the `showArts` array. If you limit the array to a certain count, use that count instead.

```

• override func tableView(tableView: UITableView!, num-
berOfRowsInSection section: Int) -> Int {
• return showArts.count

```