


ViewController you just added to the Main.storyboard. Set the Segue as 'Show (e.g. Push)' for the ViewController and name the Identifier as 'viewpost'.

Now right click on the DigitReader project folder and select a new file like we did for the main view. We will add another Cocoa Touch Class first. Click Next and then name it PostViewController as a subclass of UIViewController. The language remains Swift.

Now use the Identity Inspector to set the name of the class for ViewController in the storyboard as PostViewController.

Now getting an HTML page from the web takes its own sweet time and we know how that can be irritating for a lot of users. This is why we have a little animation running on most screen, yes, that little rotating set of dots you see on a buffering YouTube window is one such animation. We call them

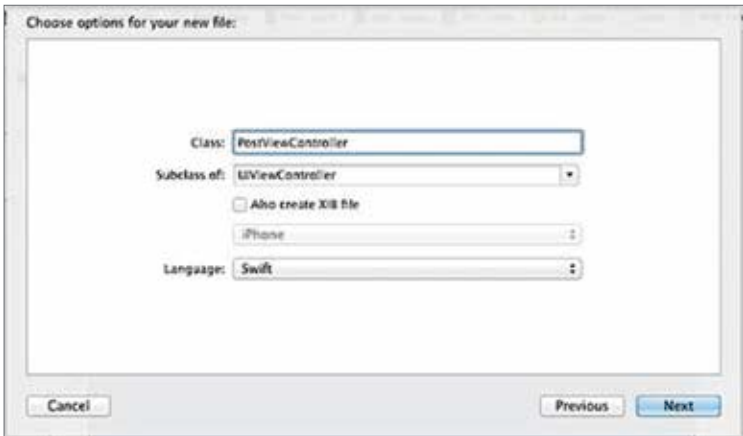

Activity Indicator View. So let's put one here so that our readers don't get bored looking at a blank screen till the post is rendered by the UIWebView.

Locate PostViewController.swift and add IBOutlet for the UIWebView and the UIActivityIndicatorView by adding the following code.

- `@IBOutlet var webView:UIWebView!`
- `@IBOutlet var activityIndicator: UIActivityIndicatorView!`

Now in the same class declaration, add UIWebViewDelegate beside UIViewController. This is necessary as we are displaying two UIWebViewDelegate functions.

- `class PostViewController: UIViewController, UIWebViewDelegate`