


website for logging in. So if one app saves a user's login information onto the keychain, other apps in the suite can access this information.

- The bundle ID is used by Apple's push service for iCloud storage and in-app purchases. These have to be unique for each of your apps.
- Apple recommends a reverse-domain name style for the Bundle Identifier portion of the app ID. For example: "com.domainname.appname."
- You can use an asterisk character to create a "wildcard" bundle ID. These can be used across all your apps but isn't recommended.
- Using wildcards makes it easier to create provisioning profiles but it prevents you from being able to use push services or in-app purchases. Click on the "New App ID" option to continue.

There will be a short description that you'll need to fill out and the bundle identifier. Your Seed ID will always be your team seed ID. Don't forget to use the "reverse-domain name style string" for your bundle ID. Once you're done click on "Submit".

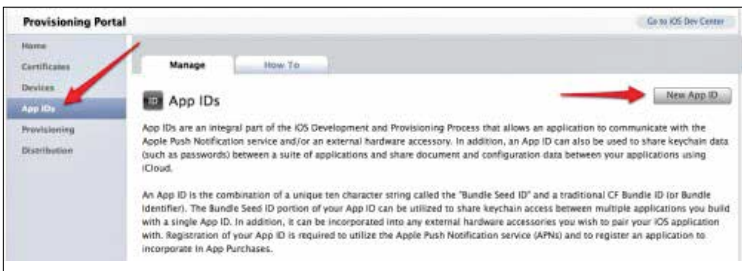

Now for the last step in the Provisioning Portal. Creating your profiles.

Go the "Provisioning" option on the left-side menu. Select "New Profile" once there. Fill in your app's name, select the certificate, the ID you just created, and the select the devices you wish to use to test your app. Once done, click "Submit".

