

Examples of Databinding:


- User enters data into an textbox and instance variable 'xyz' in component class is automatically updated by Angular.
- Computation of any mathematical expression is carried out by component class and sets a variable to the result. New value in HTML is automatically updated by Angular.
- According to the variable in component class the visual mode , hiding or sharing elements can be changed. This variable can be changed by any event.

User interface of components can be controlled by changing variables, user inputs or allowing them to change some variables with help of Data Binding. It is incredibly powerful and easy to use.

Model View Controller:

This is used for implementing user interfaces. It divides application into three parts:

- The Model (data)
- View (what user sees)
- Controller (the command to update the model).

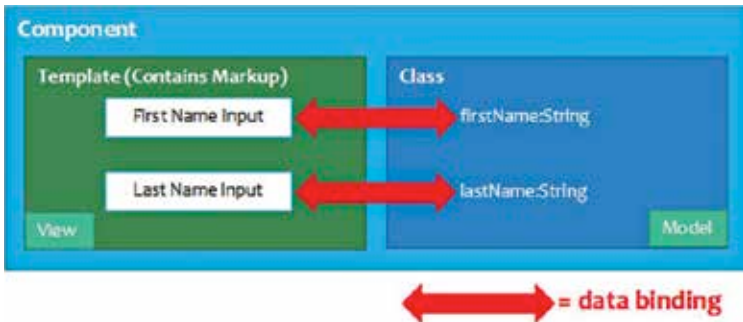

Data-binding example

So in Angular 2.0 the Model is the data inside the Component Class, the View is the Component template and Controller is the code in Component Class. Component template can be considered View and data in the Component Class as Model and property in the Model is same as Instance Variable of the name in the Component Class.