




	Name	Data type	Sample field value 1	Sample field value 2	Sample field value 3
1	age	Numeric	age	44	20
2	job	Categorical	job	other job	other job
3	marital	Categorical	married	married	married
4	education	Categorical	education	high school	high school
5	sex	Categorical	sex	male	male

Sift through the schema details that AML generates based on your data.

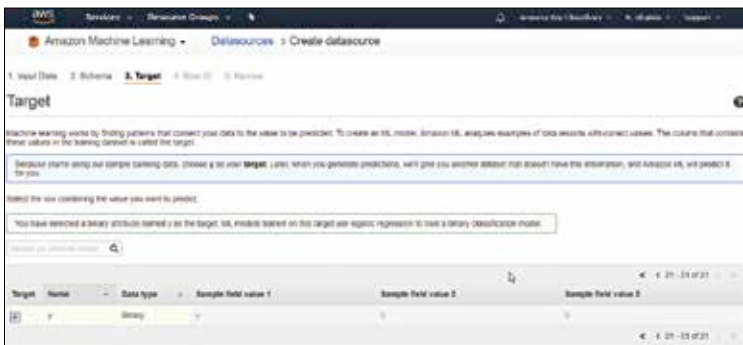

	Target	Name	Data type	Sample field value 1	Sample field value 2	Sample field value 3
1	Y		Binary	Y	Y	Y

Specify the target for your data model.



	Row identifier (optional)	Name	Data type	Sample field value 1	Sample field value 2	Sample field value 3
1						

A row identifier is optional but helpful in the long run.

The target output is also filled based on the input data source that we just configured.

- We then configure what we call a 'amazon recipe' for pre-processing of the input data as well as splitting it into training, test and validation datasets. Pre-processing also allows us to run basic operations on data