


provides simple ways to authorise user actions with respect to a given resource. There are two ways through which this is achieved:

1. Gates: they provide simple, closure based approach.
2. Policies: Like controllers, by setting logic through them we can set a particular model or an approach.

Now let us take a deeper look at how we can use Gates and Policies for authorisation.

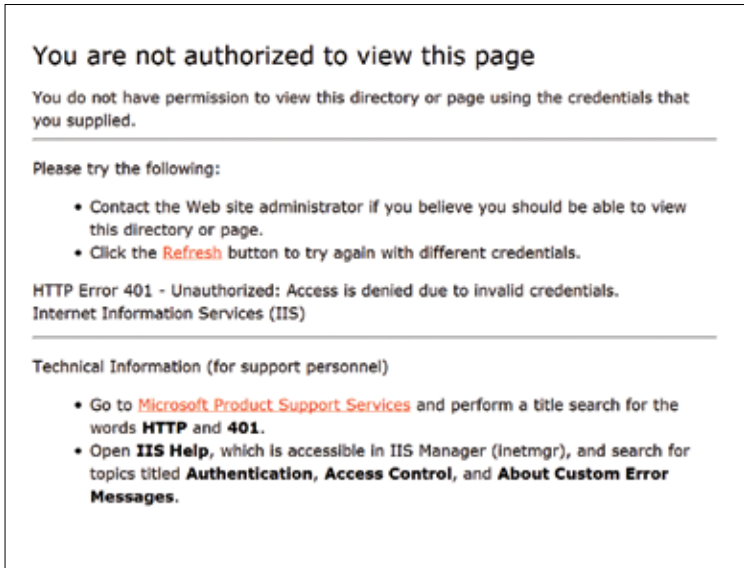

Sometimes we need to include an authorization mechanism which restricts entry to certain users

Gates

Gates (as the name suggests) determine if the user is authorised for performing a particular task or not. This information is stored in the 'App\Providers\AuthServiceProvider' class using the 'Gate' facade.

```
/**
 * Register any authentication / Authorisation services.
 * @return void
 */
public function boot()
{
```