


command `$table->unique('email');`, a new index will be created after creation of the column.

Seeding

Laravel provides seed classes located inside `database/seeds` directory, which helps you to seed your database. The framework defines a `DatabaseSeeder` class by default using which you can use `call()` method to run other seed classes. It will help you to manage and control the seeding order. You can generate a seeder by executing the command - `php artisan make:seeder`, which consists of `run()` method. You can insert data into the relevant database from within the `run()` method by using query builder.

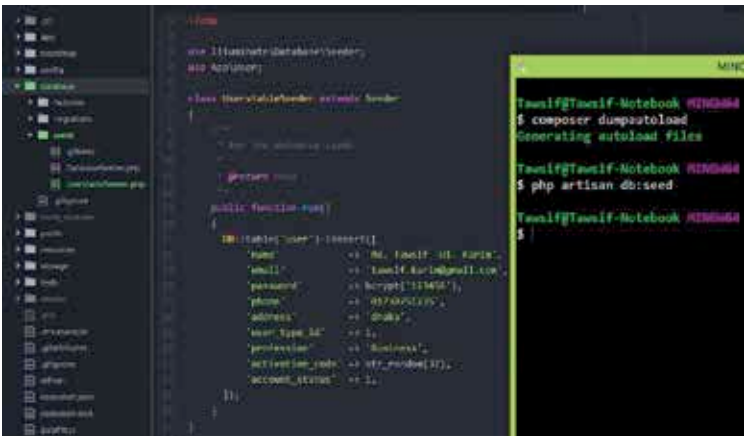

Laravel seeding in action

It is also possible to use Eloquent model factories, which are capable of generating large amounts of database records easily. The factory helper function helps you to insert records into the database. If you would like to execute additional seed classes, you should use the `call()` method within the `DatabaseSeeder` class. The Composer's autoloader can be regenerated after the creation of the seeder using the `dump-autoload` command. You can then make use of the `db:seed` Artisan command to seed the database. The `db:seed` command automatically runs the `DatabaseSeeder` class but you can also use `--class` option to run a specific seeder class. The `migrate:refresh` command can also be used to seed the database, which will perform the work of rollback and execution of all migrations.