


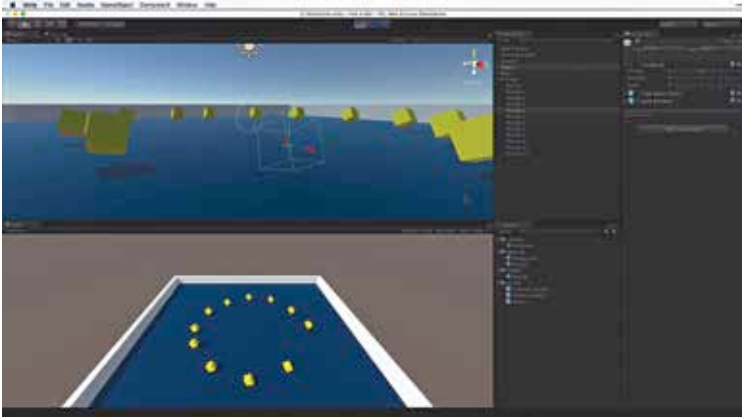

By default, the physics engine does not allow two objects to overlap.

- **Compare Tag-** this allows you to efficiently compare the tag of any game object to a string value

You use these 3 parts to write the code shown earlier. This code will be called every time a trigger is touched. What will happen in that case is that the tag of the collider touched will be tested and if the tag is the same as the string value `PickUp`, this object will be collected. This will call `SetActive (false)`, which will deactivate that game object. Save the script and return to Unity.

To set up the tag value for the pickup objects, select the relevant prefab asset. Select `Add Tag` which brings up the `Tags and Layers Panel`. To create a new custom tag select the `+` button which adds a new row to the tags list. In the new empty element type `PickUp`. Remember the tag name is case sensitive and needs to be exactly the same string as the one in the script. From the `Tag` drop down menu, select the newly created tag which assigns the particular tag to the prefab and thereby to all the collectible objects.

But you are not yet done. Test the game to find out. You are still bouncing off the collectible objects rather than collecting them. This is due to the mechanics of Unity 3D physics system.

Understanding the Physics Engine

As a general rule, and this is quite intuitive, Unity's physics engine does not allow 2 collider volumes to overlap. That's like saying that 2 objects with mass cannot occupy the same space. So when two collider objects come