


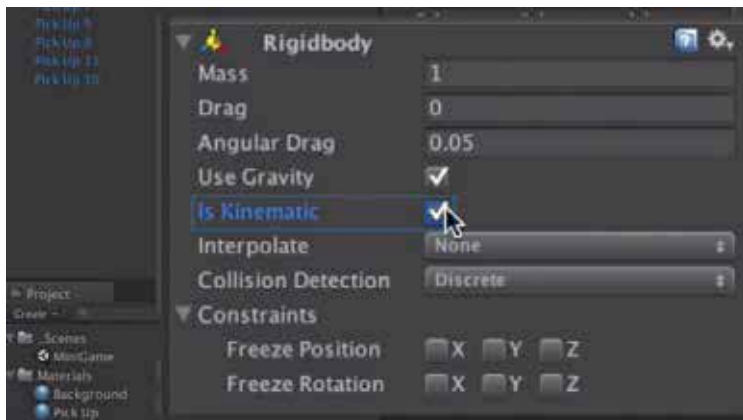

A kinematic rigid body will not react to physics forces.

into contact, there has to be a reaction. Follow Newton's law here- for every action there is an equal and opposite reaction. So if 2 objects in motion collide, they both will be pushed away. If one object in motion collides with a static or stationary object, only the one in motion will be pushed away. So when the Player collides with the Pickup, the Player bounces off since the Pickup is stationary and cannot move. The same rule applies when the player collides with other static objects like walls.

So how to resolve this problem?

Using Trigger Colliders

The physics engine can allow the penetration or overlap of collider volumes. When it does this the it still calculates the collider volumes and keeps track of the collider overlap but doesn't cause a collision. So essentially one collider volume passes through another. This is done by converting colliders into triggers or trigger colliders.

After conversion, any contact with that trigger is detected through the OnTrigger event messages. Using this functionality, you can make other fancy events like springing a trap on a player when it passes through a particular area by making that area into a trigger or place a trigger in the middle of a doorway in an adventure game, and when the player enters the trigger the mini-map updates and a message plays "You have discovered this room". Select the prefab asset and in the box collider component select Trigger. Since you selected the Prefab, all the pickup objects have same