


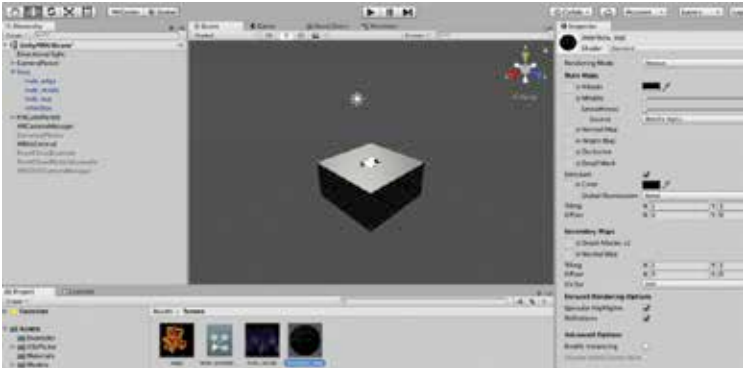

An ARKit Sample Scene in Unity

previewController(previewItemAt). Next, set up the model by opening it up in Unity and set the dimensions along with the rest of the scene parameters and insert the following code to the Xcode system:-

```
• func numberOfPreviewItems(in controller: QLPreviewCon-
troller) -> Int {
•     return 1
• }
• func previewController(_ controller: QLPreviewCon-
troller, previewItemAt index: Int) -> QLPreviewItem {
•     let url = Bundle.main.url(forResource:
models[thumbnailIndex], withExtension: "usdz")!
•     return url as QLPreviewItem
• }
```

The first function is used to specify the number of previews of the model in the scene where we returned 1.

Sample Scene In Unity

The second function specifies what file should be used along with its reference. We define a constantly called url that is the path of *the .usdz* files which is returned as a QLPreviewItem.

Next navigate to the collectionView(didSelectItemAt) and modify it to look like the following:

```
• func collectionView(_ collectionView: UICollectionView-
```