

Next up, you'll be training the model, or you can choose to work a pre-trained model which can be downloaded from Google Developers directly.

The website has a separate COCO dataset with pre-trained models that can be used to compare the results that you get from the actual outputted results. You can send a prompt to the website by writing an import function with the address for the dataset.

On downloading the necessary models, reconfigure them to be used for the object detection API.

Clone the TensorFlow model repository and then locate the object detection folder and input the following commands to activate additional resources:


```
• python train.py --logtostderr --train_dir=training/
--pipeline_config_path=training/ssd_mobilenet_v1_pets.
config
```

This will take up some time due to the size of the folders and packages, so be sure to have some considerable space set apart for them. All files will thus be extracted to the training folder where the progress of the entire system can be visualised by the following commands in the object detection folder.

```
• $ tensorbord --logdir='training.'
```

The above code will set the dataset in training mode and will generate the model file(.bp) in the specified output folder. Create a checkpoint prefix folder of the format for storing results in the future by using the following code:-

```
• python export_inference_graph.py \
• - input_type image_tensor \
• - pipeline_config_path training/ssd_mobilenet_v1_
```

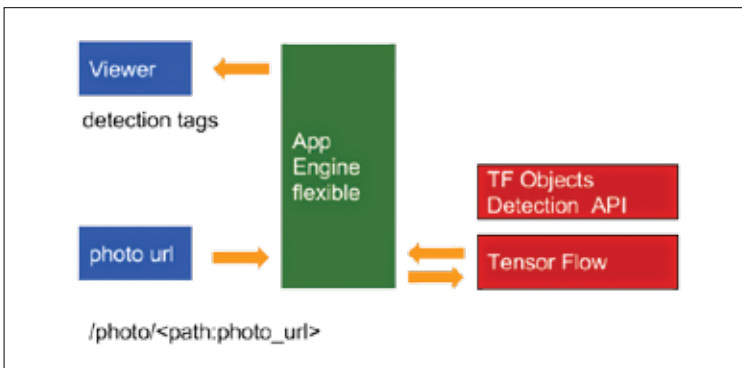

General Pathway Of Object Detection