


```

signature_def_map={
    'detection_signature':
        detection_signature,
    signature_constants.DEFAULT_SERVING_SIGNATURE_DEF_KEY:
        detection_signature,
},
)
builder.save()

```

Notice how the system specifies the inputs and outputs to be saved as separate arrays. When you view these in the saved folder, you will notice that the arrays are incomprehensible, but that's just because the images have been restructured in a format that the computer understands.

The details for the model path along with the inputs must be both saved as the system will not remember how it arrived at the weights and dimensions for the object if the code is executed on a fresh new TensorFlow terminal. This is because the system would treat it just like a new dataset. The code

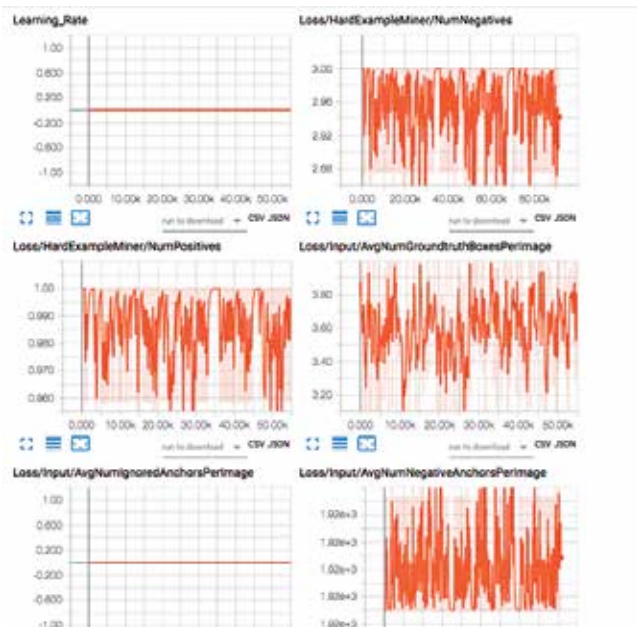

Loss Function Graphs Generate From Code