


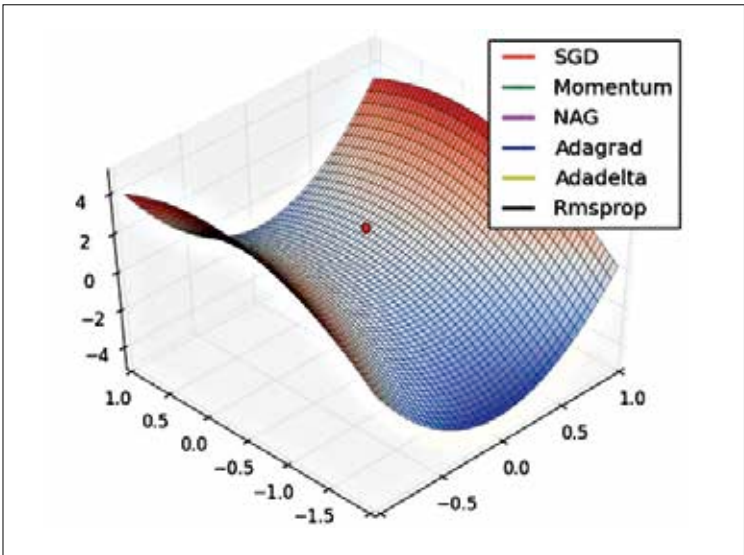

Optimizers in Keras

optimizer (SGD), Root Mean Squared Optimizer (RMSprop), Adam optimiser, Adadelata optimiser, Adagrad optimiser, Nadam optimiser and many others.

- **Loss:** It is the objective function, that tells the compile method to track losses or the drift from the function during training the model. Various loss functions are available for use such as mean squared error, mean absolute error, squared hinge loss, categorical hinge loss, categorical cross-entropy loss, binary cross-entropy loss, kullback leibler divergence loss and many more. In the case of multiple outputs, you can use a different loss function on each output by passing a list of losses. The loss value that is computed by the model is the sum of all individual losses.
- **Metrics:** It specifies the list of metrics that are to be evaluated by the model during training and testing. The commonly used metric is the accuracy metric. In case you want to specify different metrics for different outputs of a multiple output model, you can pass the metrics as a dictionary.
- **loss_weights:** It contains the optional list or dictionary that specify scalar coefficients or Python floats that are used to weight the loss contributions of different model outputs. The loss value that will be optimised will be the weighted sum of all individual losses, each weighted by the