

string parameter is used for the batch that shuffles the data in batch-sized chunks. It works only when the `steps_per_epoch` is not empty.

- **validation_steps:** It indicates the total number of steps or the batches of samples to validate before stopping. It works only when the `steps_per_epoch` is not any.
 - **validation_freq:** It takes input in the form of an integer or list. If the input is an integer, then it specifies the number of training epochs to run before a new validation run is performed. If the input parameter is a list, it specifies the epochs on which the model has to run validation. It only runs when the `validation_data` parameter is not any.
3. **evaluate:** This function evaluates the loss value and metrics values for the model in test mode. All the computation is done in batches as specified by the `batch_size`. It returns a scalar test loss if the model has no metrics and a single output or a list of scalars in case the model has multiple outputs and metrics. It takes the arguments as `x`, `y`, `batch_size`, `verbose`, `sample_weight`, `steps` and `callbacks`.
 4. **predict:** This method generates output predictions for the input samples. All the computation are done in batches as specified by the `batch_size`. It returns a numpy array(s) of predictions of output labels. It raises an error if there is a mismatch between the provided input data and the

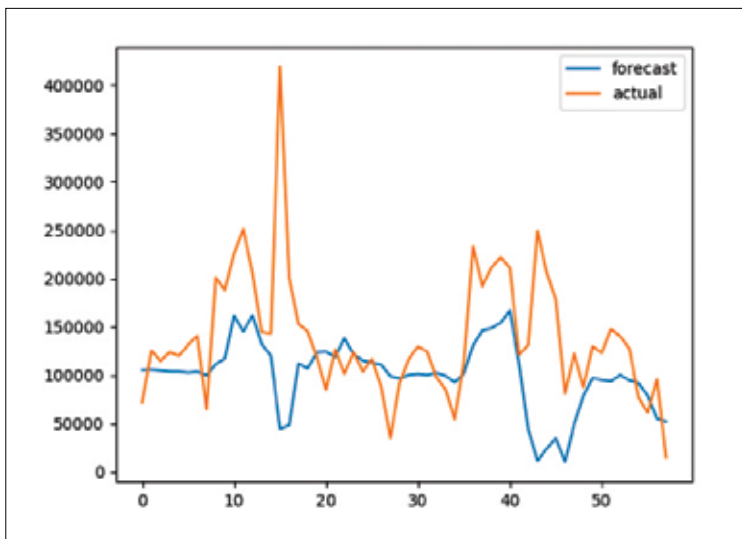


Figure 4: Prediction in Keras