


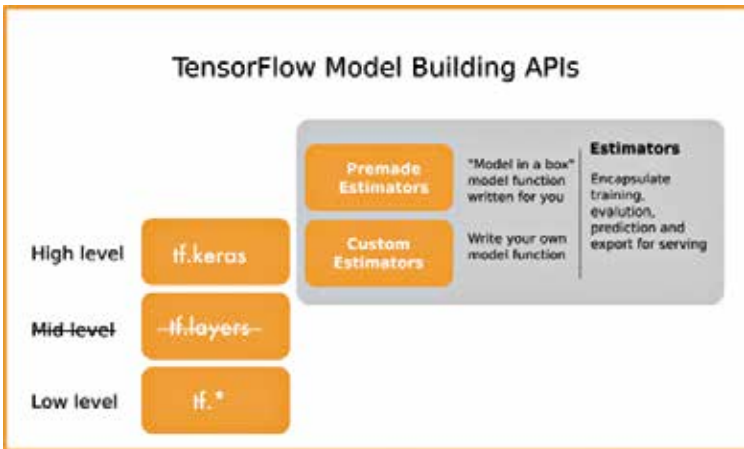

TensorFlow Example of Functional API

```

•
• # Split data into test and train
• dat_train = dat[idx_train,:]
• dat_test = dat[idx_test,:]
• y_classifier_train = y_classifier[idx_train]
• y_classifier_test = y_classifier[idx_test]
• y_cts_train = y_cts[idx_train]
• y_cts_test = y_cts[idx_test]
•
• # Build the model with Functional API
• inputs = Input(shape=(3,))
• output = Dense(1, activation='sigmoid')(inputs)
• logistic_model = Model(inputs, output)
• # Compile the model
• logistic_model.compile(optimizer='sgd',
•                        loss = 'binary_crossentropy',
•                        metrics=['accuracy'])
• # Fit on training data
• logistic_model.optimizer.lr = 0.001
• logistic_model.fit(x=dat_train, y=y_classifier_train,
epochs = 5,
• validation_data = (dat_test, y_classifier_test))
• from keras.layers import Input
• visible = Input(shape=(2,))

```