


uine requests. There are multiple ways to overwhelm the web server – SYN flooding, buffer overflow attack, Ping of death, HTTP GET Request Flooding.

Website defacement

SQL injection attacks are used to deface websites. A hacker can use vulnerabilities in the website to inject SQL strings which are executed by the web

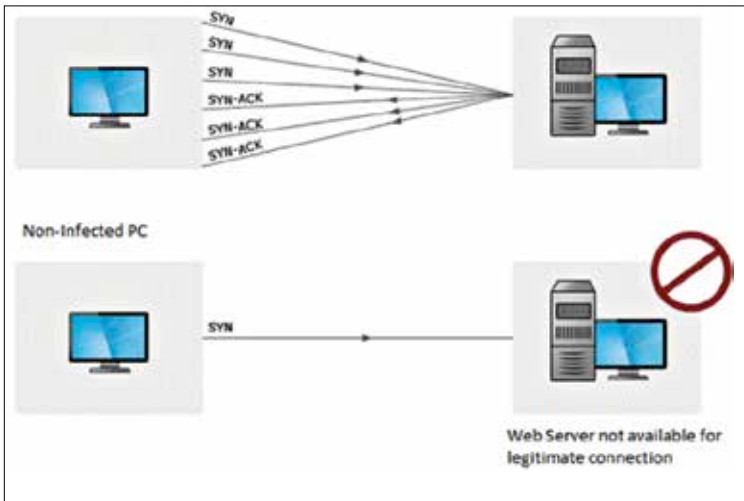

Denial of Service Attack

browser to show malicious content. The hacker might store irrelevant data in the database. Now, when the website is requested, due to the corrupt database, irrelevant data is seen on the website. This defaces websites and might lead to loss of customers and potential revenue.

Directory traversal

This is a type of vulnerability where a hacker gets access beyond the web root directory from the application. If the hacker could access beyond web root directory, restricted directories could easily be revealed using OS commands.

Sniffing

Hackers may intercept unencrypted data sent over the network and use it to gain access to the web server without authorization.